


# KV-1882AEB

## RM-626

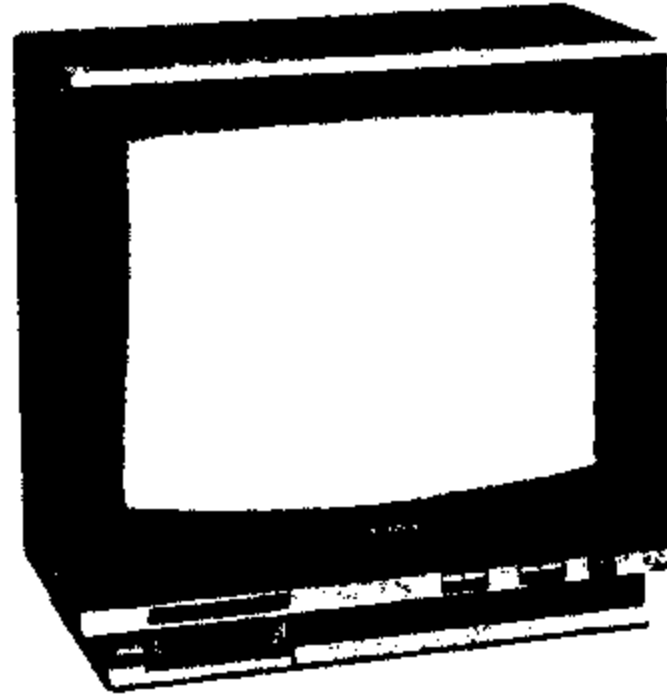

### *PX Model*

Serial No. 500,001 – 505,300

Chassis No. SCC-573A-A

Serial No. 503,001 and later

Chassis No. SCC-573A-B

### *E Model*

Chassis No. SCC-573A-B

## XE-3 CHASSIS

December, 1984


### SPECIFICATIONS


Television system	CCIR system B, G and H	CCIR system I	System M
Color system	European PAL	UK PAL	NTSC
Channel coverage	VHF E2–E12 Cable TV S1–S3, M1–M10 and U11–U20 UHF E21–E68	UHF B21–B68	VHF A2–A13 Cable TV A–2–W UHF A14–A78

Picture tube	(a total of up to 30 preselected channels) Trinitron tube Approx. 47.2 cm (18 inches) 90 degree deflection (Approx. 43.7 cm picture measured diagonally)
Antenna	75-ohm standard coaxial socket
Speaker	5 × 9 cm
Audio output	2 W
Power requirements	110–240 V AC, 50/60 Hz
Power consumption	82 W 12.5 W in stand-by condition
Dimensions	Approx. 452 × 440 × 470 mm (w/h/d)
Weight	Approx. 19.5 kg
Accessory supplied	Remote Commander RM-626 (1)

## 1




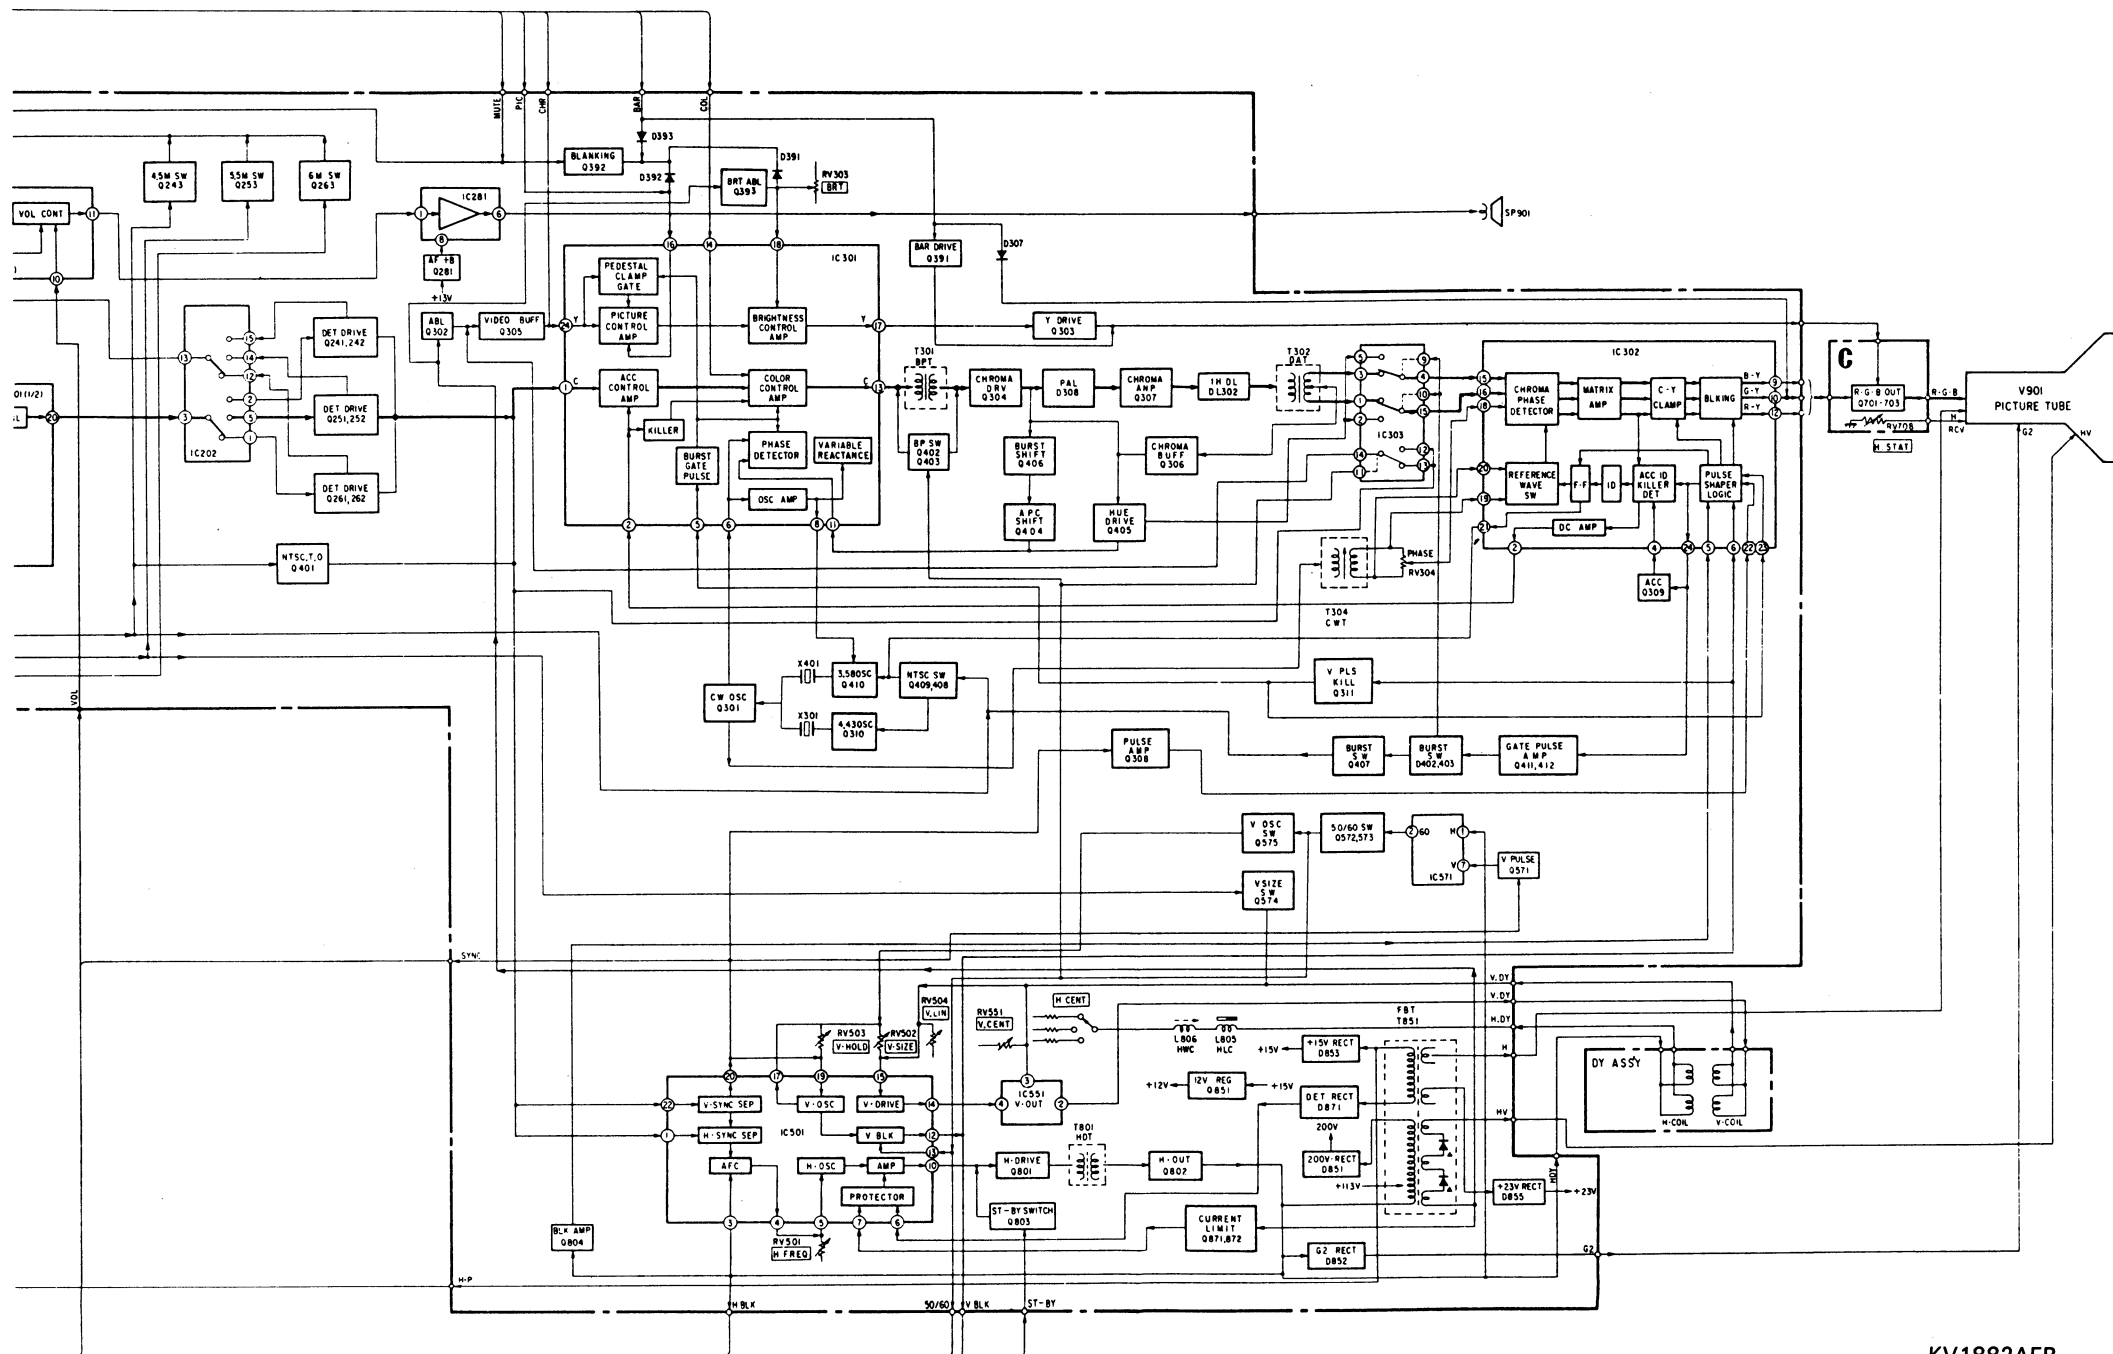


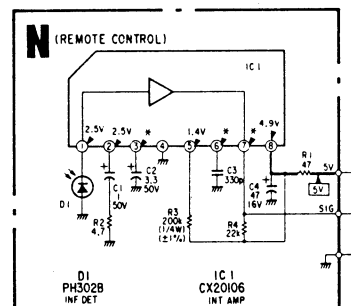


**CAUTION**





When replacing IC601, be sure to check the +B voltage value. Refer to the Safety Adjustment Section.

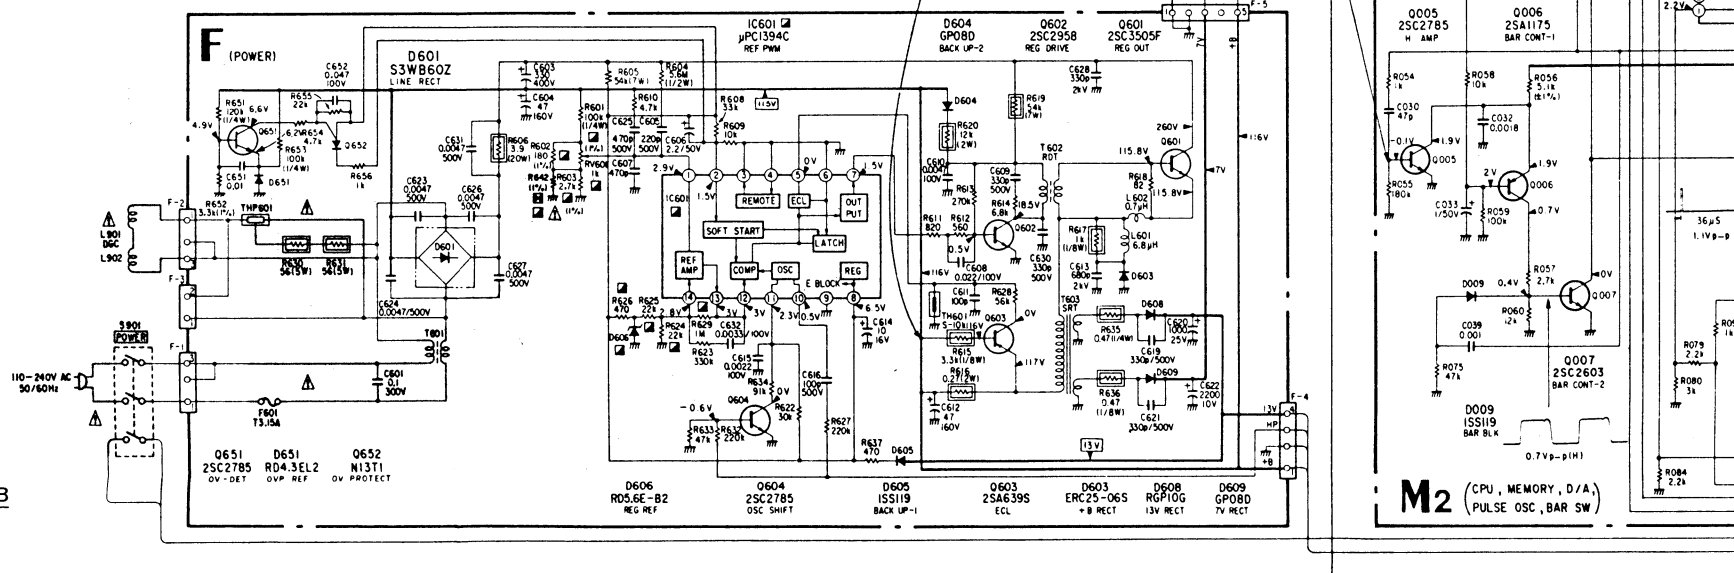

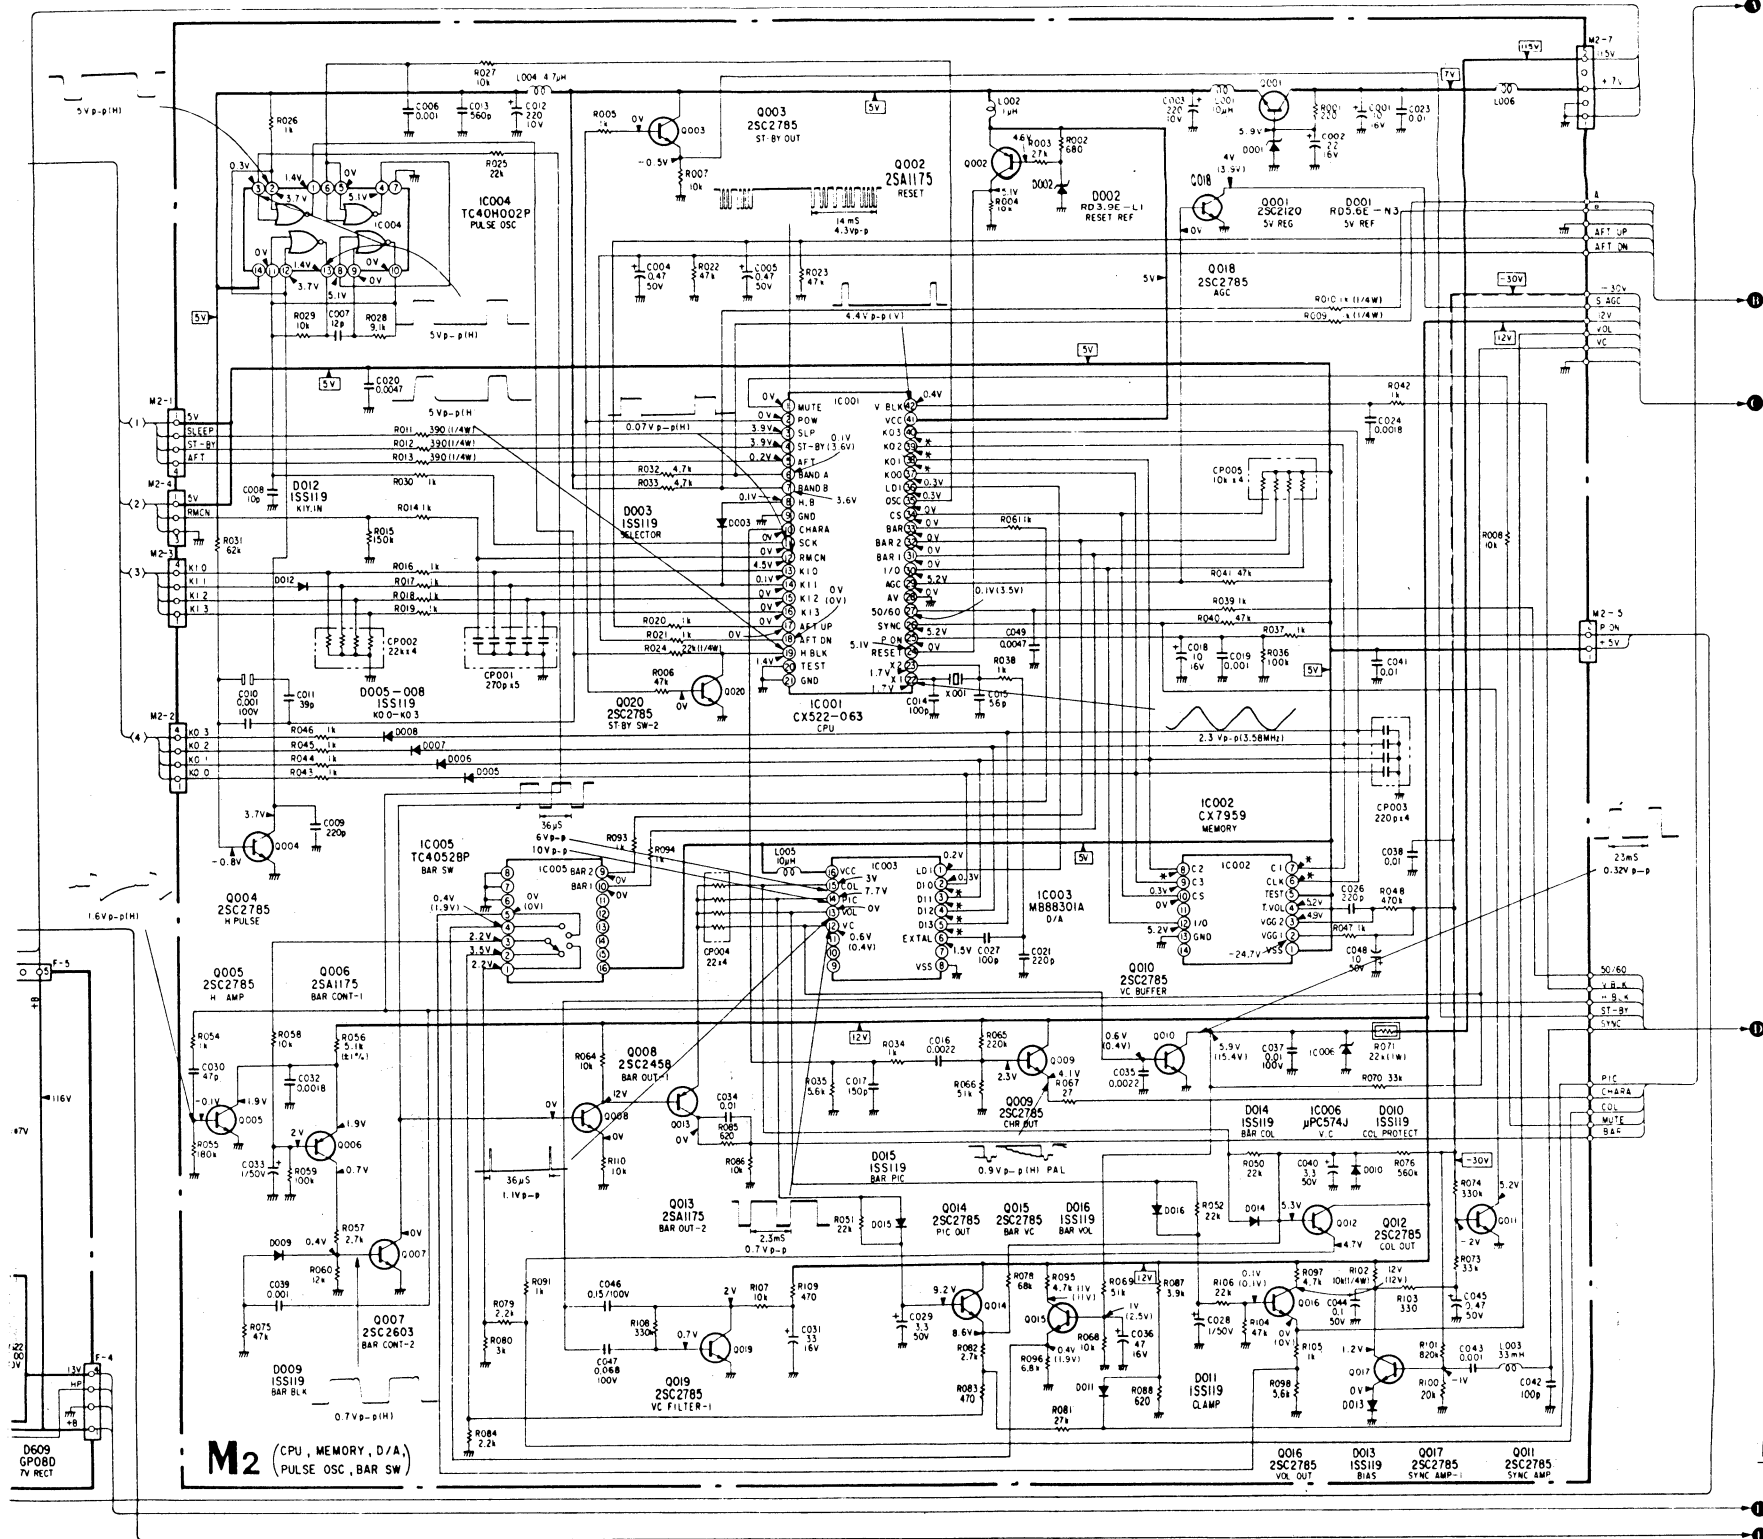




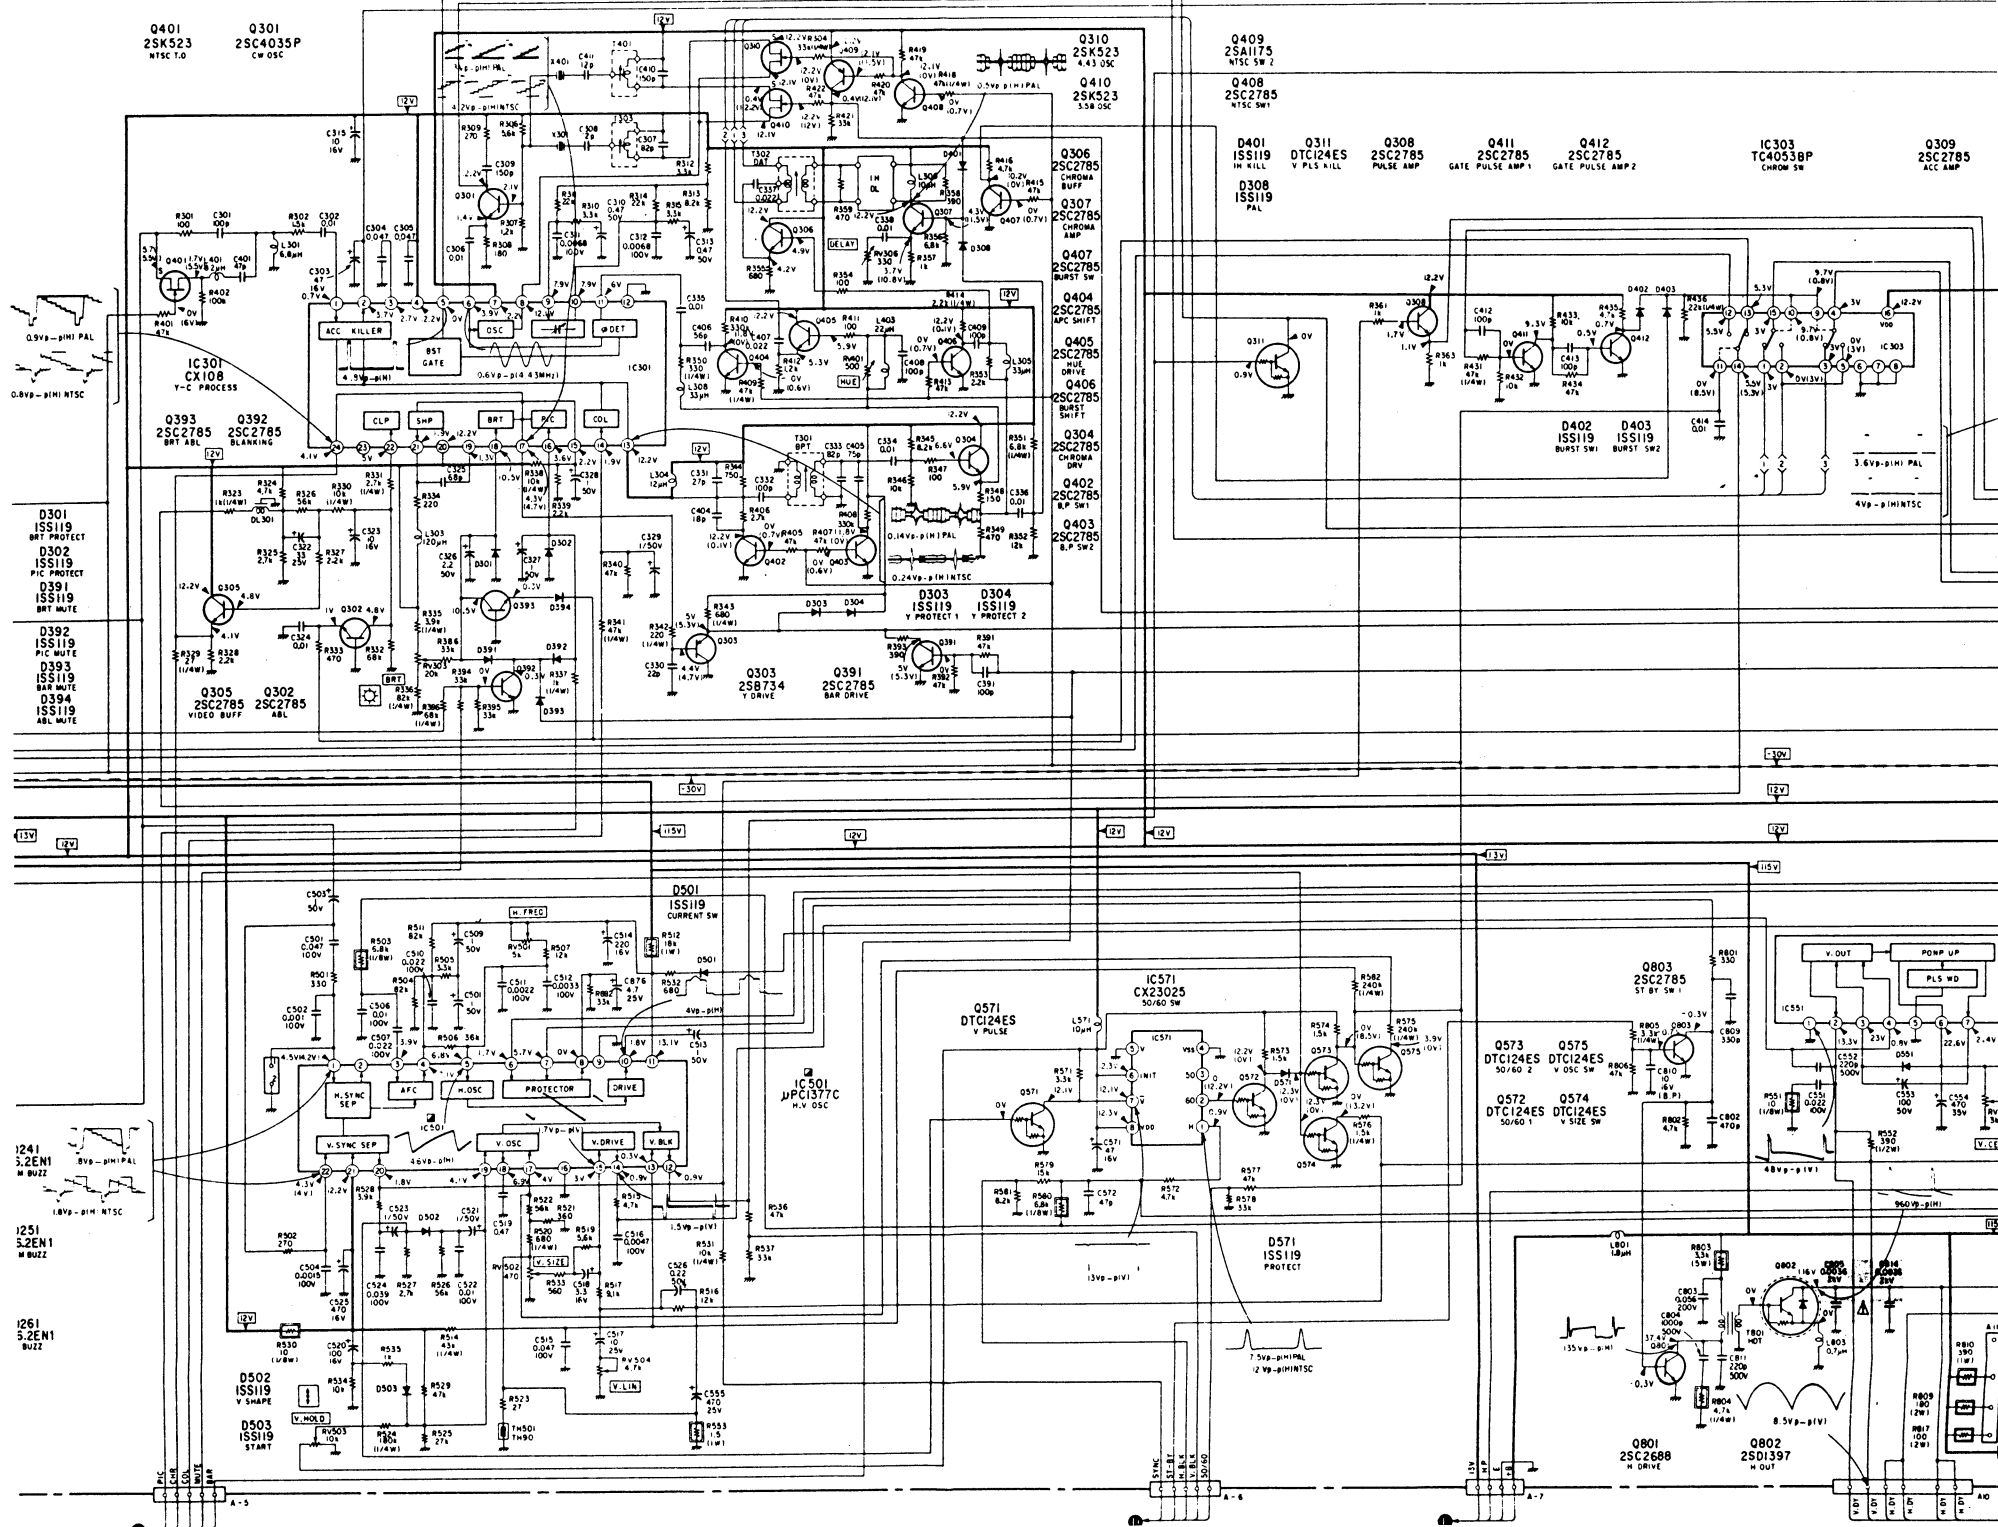

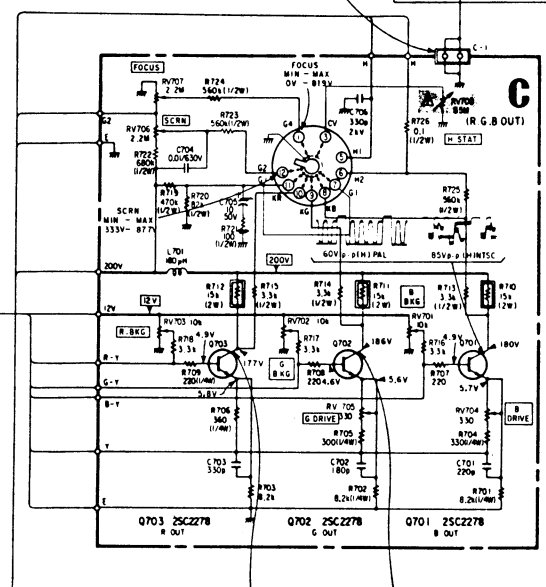


**CAUTION**  
After replacing R871, confirm that the voltage more than 12.5 V dc is presented at TP-86.






— C Board —

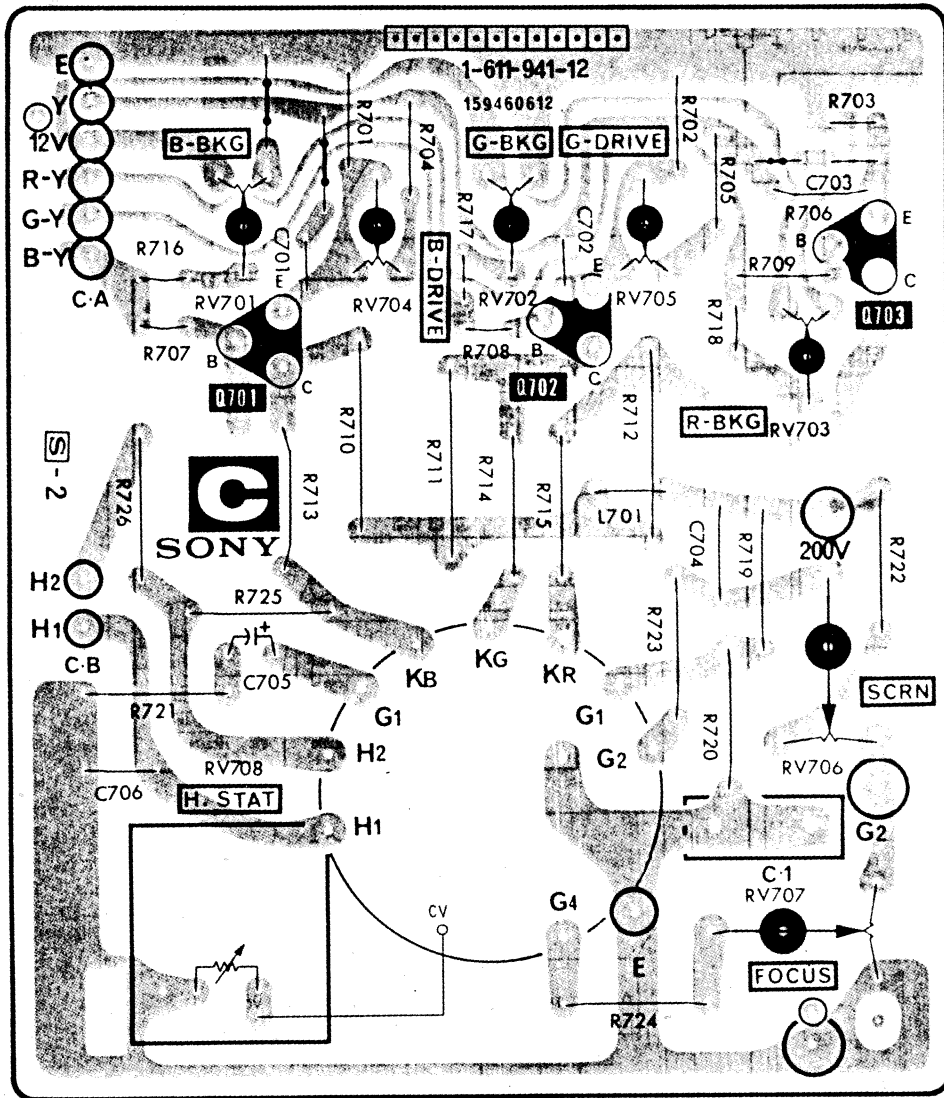


— M2 Board —


009	013	005	012	002	004	004	004
005	006	015	019	016	011	014	010
005	006	015	019	016	011	014	010
009	011	013	016	019	020	003	012

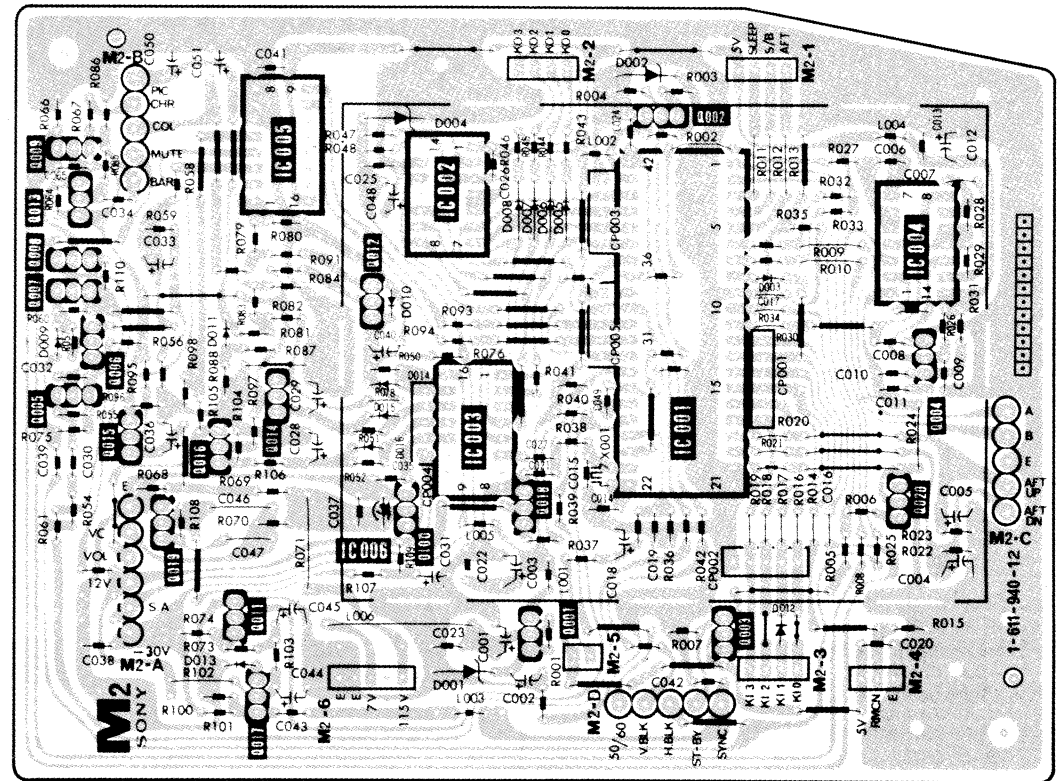


— M1 Board —

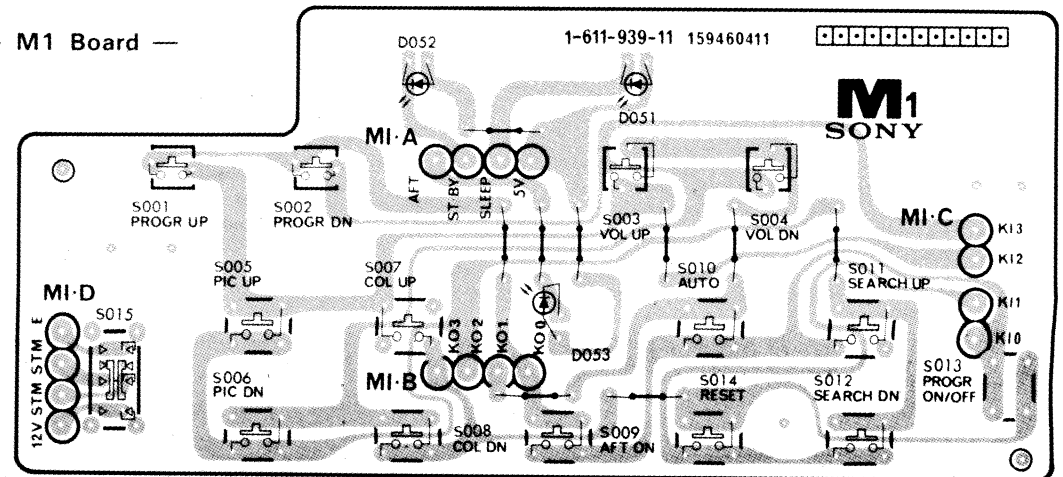


— N Board —

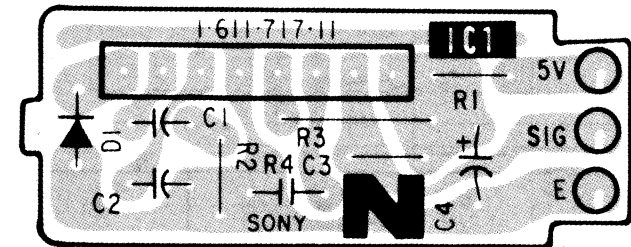

— F Board —

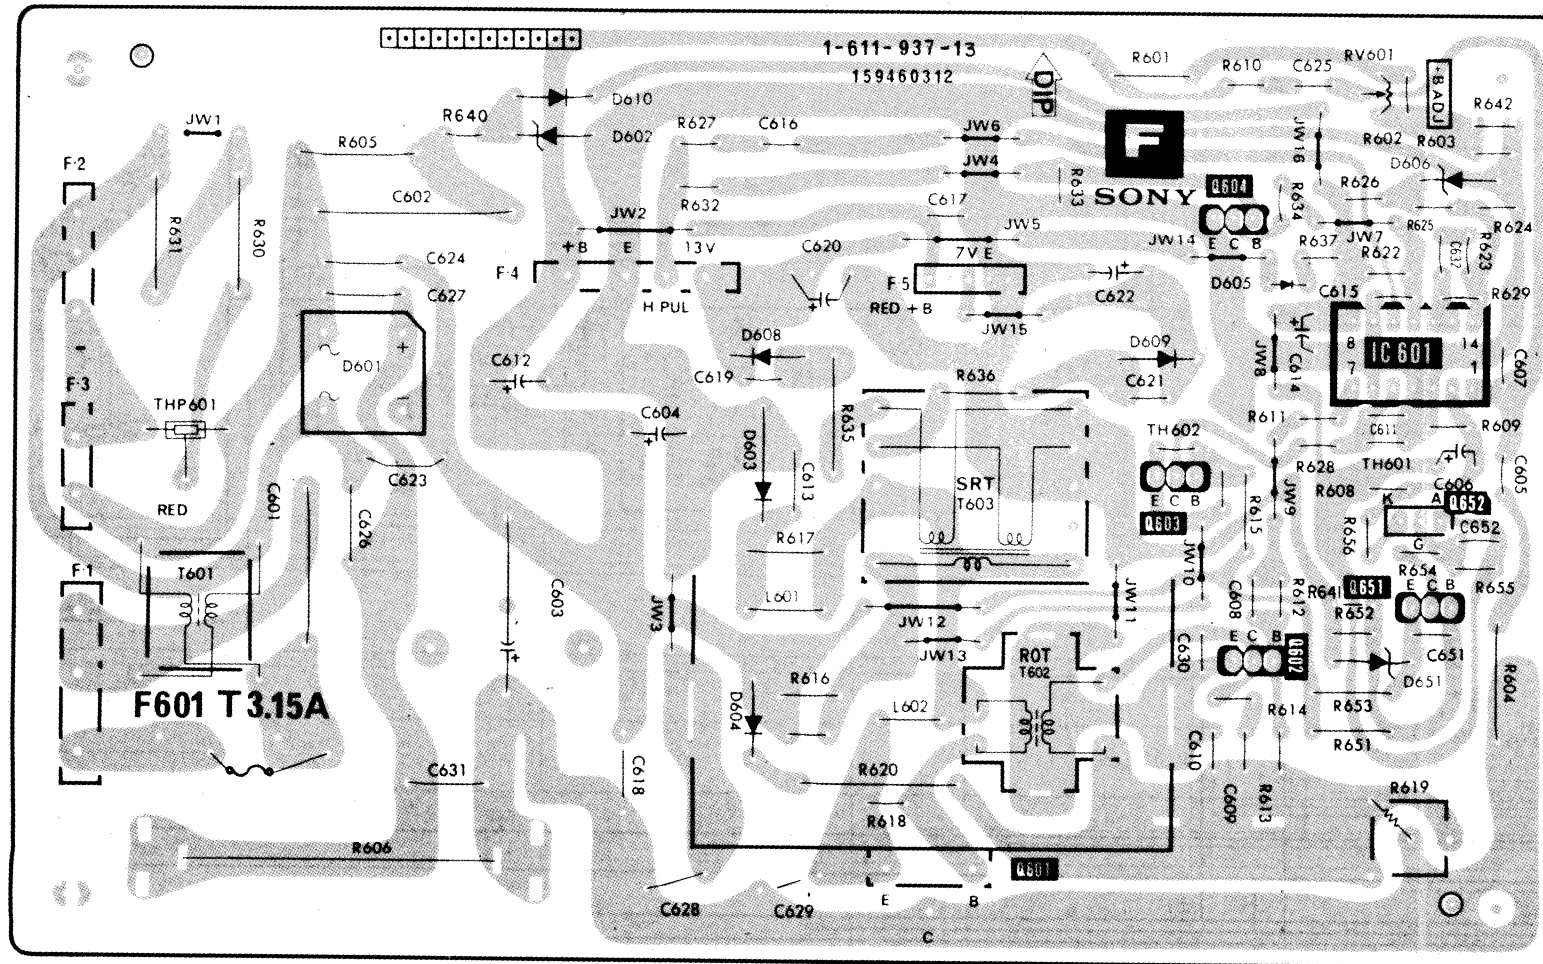

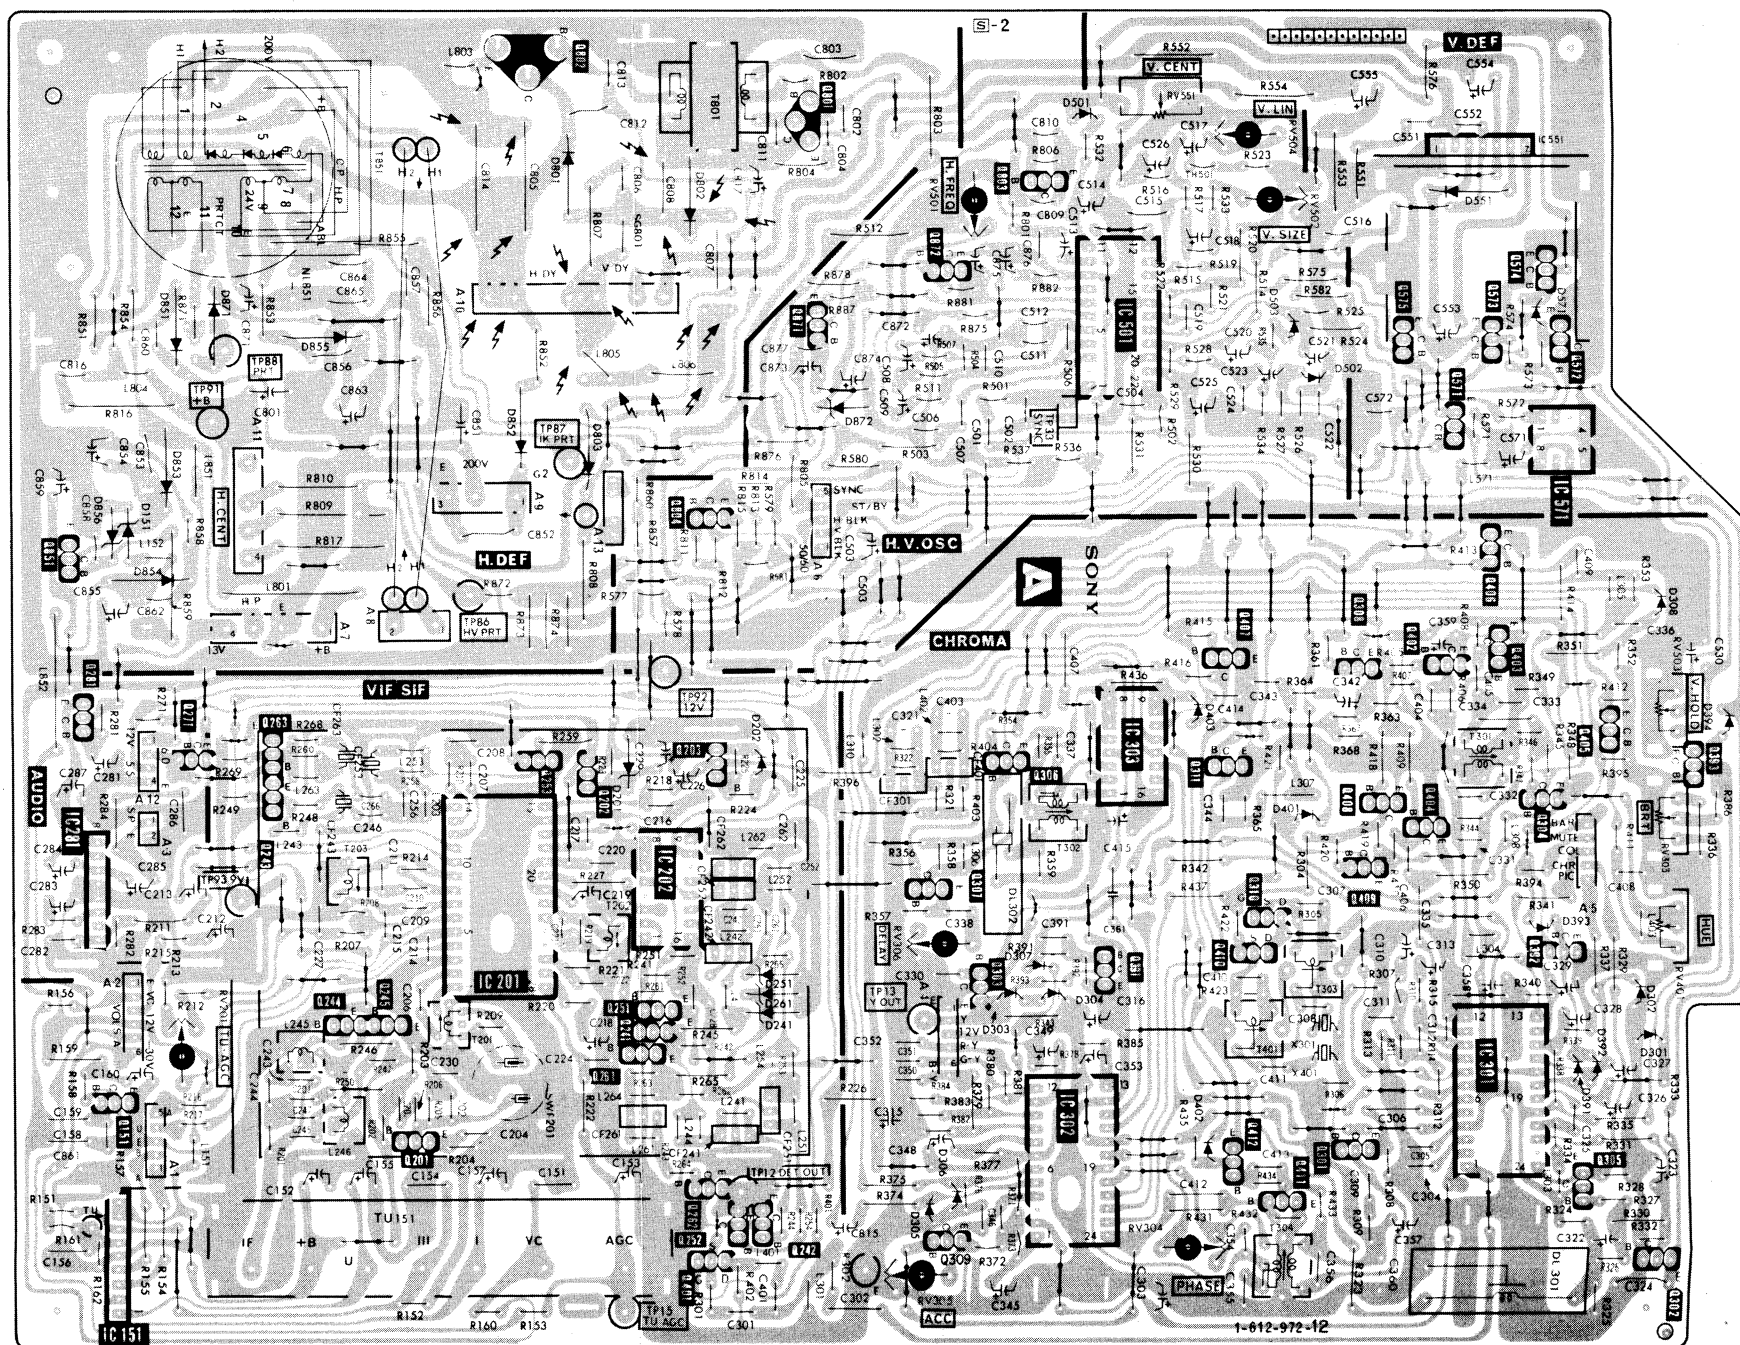

## EXPLODED VIEWS


### NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

- As to the part numbered with E-, refer to the electrical parts list.
- Items marked \* are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

### 1. BACK COVER

• : TA. BV3x12 7-685-648-71

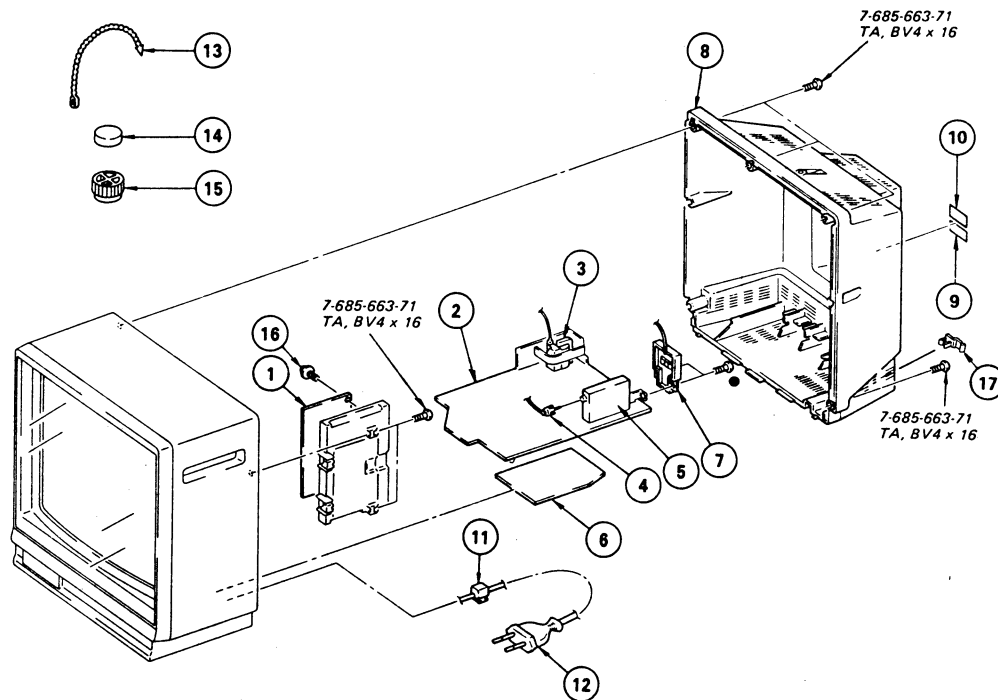


No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
1	*A-1245-229-A	F BOARD, COMPLETE		9	4-010-023-05	LABEL, X-RAY	
2	*A-1295-895-A	A BOARD, COMPLETE		10	*A-371-545-01	LABEL, MODEL NUMBER	
3	A-1-439-333-11	TRANSFORMER ASSY. (FLYBACK)		11	A-1-022-115-01	WOLBEN, 2 CORD	
4	*A-1-534-805-00	PIN CABLE		12	A-1-551-427-21	CORD, POWER, EULO. FLOE	
5	A-1-463-421-00	TUNER, ET. 181-8831		13	4-308-870-00	CLIP, LEAD WIRE	
6	*A-1301-598-A	M2 BOARD, COMPLETE		14	1-452-032-00	MAGNET, DISK; 10MM	
7	A-1-536-494-21	ANT. TERMINAL ASSY		15	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM	
8	X-4371-509-2	COVER ASSY, BACK	17	16	4-302-428-00	HEAD, WASHER, TAPPING SCREW	
				17	4-329-127-00	CLAMP, CORD	

KV1882AEB

488

### 2. PICTURE TUBE

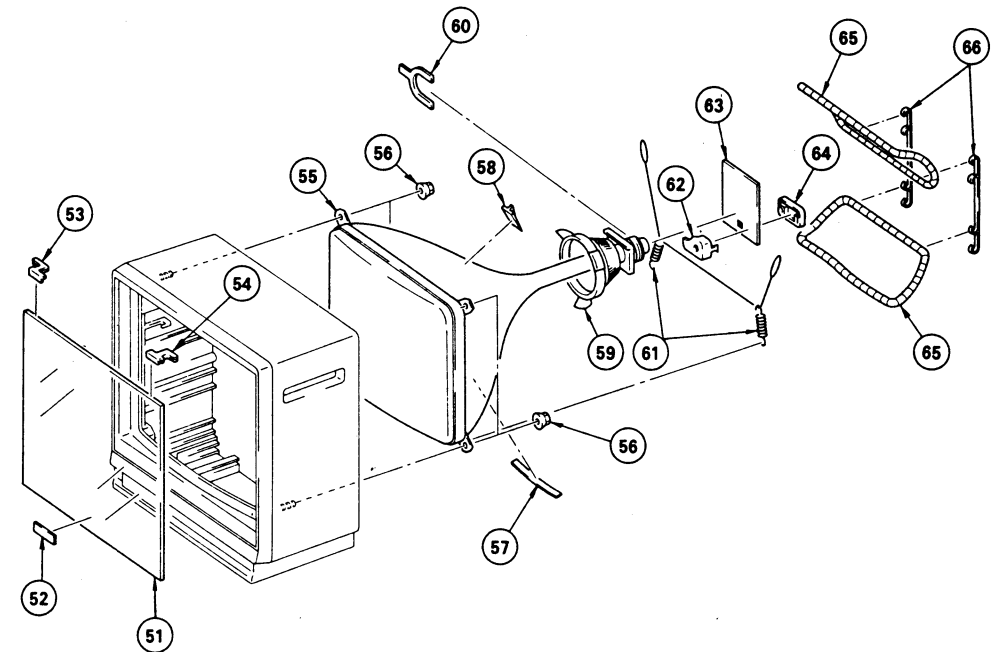


No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
51	4-369-314-01	GLASS, FILTER		59	A-1-451-247-11	DEFLECTION YOKE (SC71391)	
52	X-3701-081-0	EMBLEM (MIDDLE) ASSY, SONY		60	1-452-277-00	MAGNET, BMC	
53	4-369-420-00	STOPPER (LEFT), FILTER		61	4-369-318-00	SPRING, TENSION	
54	4-369-419-00	STOPPER (RIGHT), FILTER		62	*A-365-803-00	COVER (MAIN), CV CONTROL	
55	A-8-736-153-05	CRT (A44JF200X)		63	*A-1330-499-A	C BOARD, COMPLETE	
56	4-306-034-00	FLANGE NUT, (8) 5MM		64	*A-365-804-00	COVER (READ LID), CV CONTROL	
57	4-369-324-01	CLOTH		65	A-1-426-179-11	COIL, DEGAUSSING	
58	3-703-961-01	SPACER, DY		66	*A-371-521-01	BAND (L), DEGAUSS COIL	



## 3. BEZEL ASSY

• : TA, BV3x12 7-685-648-71

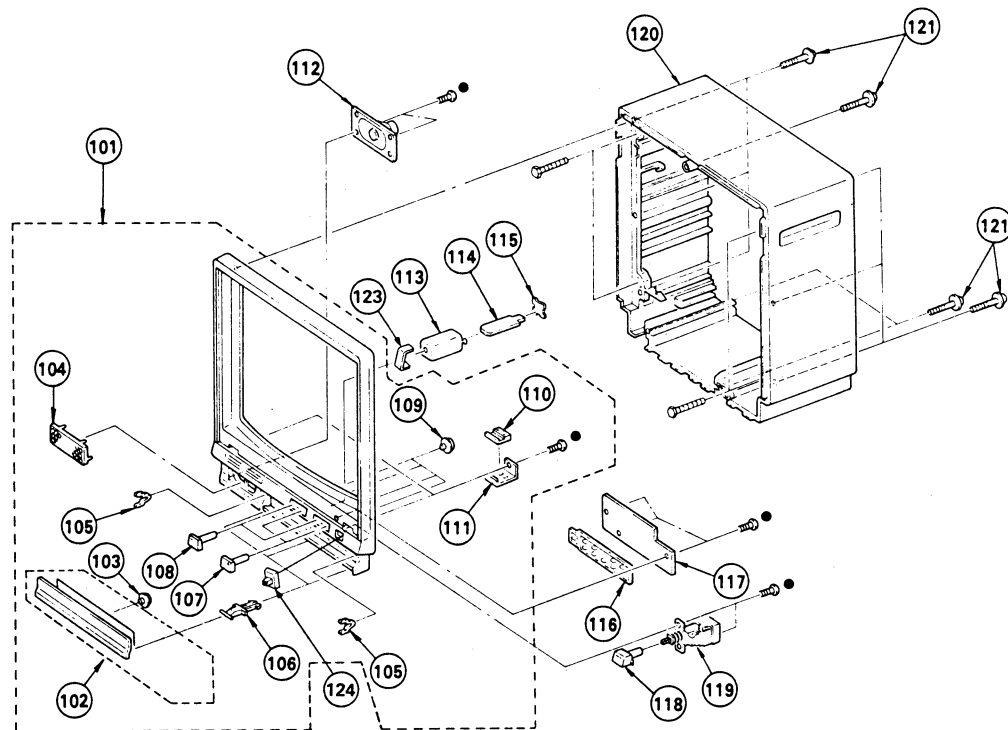

No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
101	X-4371-512-1	BEZEL ASSY	102,103,104,105,106,107,108,109,110,111	111	4-336-806-00	HOLDER (RIGHT), FILTER	
102	X-4371-511-1	DOOR ASSY, CONTROL	122	112	1-503-239-00	SPEAKER	
103	*:4-371-504-01	TUBE, OPTICAL		113	*:4-342-117-00	CASE, SHIELD (MAIN), R	
104	*:4-371-503-01	PLATE, ORNAMENTAL, SPEAKER		114	*:1-611-717-11	N BOARD	
105	3-703-574-00	RETAINER, DOOR		115	*:4-342-118-00	LID, SHIELD CASE, R	
106	3-662-365-00	SHAFT (S), DOOR		116	4-371-509-01	BUTTON, MULTI	
107	4-354-587-11	PUSH BOTTON (+)		117	*:1-611-939-11	MI BOARD	
108	4-354-588-11	PUSH BOTTON (-)		118	4-371-502-01	BUTTON, POWER	
109	4-365-220-00	STOPPER, BUTTON		119	*:1-553-225-12	SWITCH, PUSH	
110	4-336-808-00	PROTECTOR, FILTER		120	4-369-312-21	CABINET	
				121	4-319-520-00	SCREW, SPECIAL (+PW4x30)	
				122	4-333-624-00	FILM (M), SPECIAL	
				124	4-371-542-01	KNOB, SLIDE SWITCHING	

## ELECTRICAL PARTS LIST

F

NOTE:

CAPACITORS  
 \* MF :  $\mu$ F, PF :  $\mu$ F \* MMH : mH, UH :  $\mu$ H  
 RESISTORS  
 \* All resistors are in ohms  
 \* F : nonflammable

\* All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

\* Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
*:A-1245-229-A F BOARD, COMPLETE *****				CONNECTOR			
	1-533-087-00	HOLDER, FUSE		F1	*:1-506-349-21	3P PLUG (L)	
	4-363-414-00	SPACER, MICA		F2	*:1-508-765-00	3P PLUG (M)	
	*:4-370-012-01	HOLDER, TRANSISTOR		F3	*:1-508-786-00	2P PLUG (M)	
				F4	*:1-508-766-00	4P PLUG (M)	
				F5	*:1-560-125-00	PLUG, CONNECTOR (2.5MM PITCH)	
CAPACITOR				FUSE			
C601	A.1-108-747-62	MYLAR 0.1MF 20% 300V		F601	A.1-532-237-11	FUSE, TIME-LAG 3.15A	
C603	1-125-222-21	ELECT (BLOCK) 330MF 20% 400V		IC			
C604	1-121-919-00	ELECT 47MF 160V		IC601	8-759-100-75	IC UPC1394C	
C605	1-102-244-00	CERAMIC 220PF 10% 500V		COIL			
C606	1-123-381-00	ELECT 2.2MF 20% 50V		L601	1-408-300-00	MICRO INDUCTOR 6.8UH	
C607	1-102-824-00	CERAMIC 470PF 5% 50V		L602	1-407-365-00	COIL, CHOKE	
C608	1-106-204-00	MYLAR 0.022MF 10% 100V		TRANSISTOR			
C609	1-102-030-00	CERAMIC 330PF 10% 500V		Q601	8-729-900-48	TRANSISTOR 2SC3505F	
C610	1-106-188-00	MYLAR 0.0047MF 10% 100V		Q602	8-729-195-82	TRANSISTOR 2SC2958	
C611	1-102-973-00	CERAMIC 100PF 5% 50V		Q603	8-729-163-93	TRANSISTOR 2SA639S	
C612	1-121-919-00	ELECT 47MF 160V		Q604	8-729-245-83	TRANSISTOR 2SC2458	
C613	1-102-249-00	CERAMIC 680PF 20% 2KV		Q651	8-729-245-83	TRANSISTOR 2SC2458	
C614	1-123-356-00	ELECT 1UMF 20% 16V		Q652	8-729-101-31	TRANSISTOR N13T1	
C615	1-106-180-00	MYLAR 0.0022MF 5% 100V		RESISTOR			
C616	1-101-810-00	CERAMIC 100PF 5% 500V		R601	1-214-777-00	METAL 100K 1% 1/4W	
C619	1-102-030-00	CERAMIC 330PF 10% 500V		R602	1-215-403-00	METAL 180 1% 1/6W	
C620	1-123-349-00	ELECT 100QMF 20% 25V		R603	1-215-431-00	METAL 2.7K 1% 1/6W	
C621	1-102-030-00	CERAMIC 330PF 10% 500V		R604	1-202-663-35	SOLID 5.6M 10% 1/2W	
C622	1-123-325-00	ELECT 220QMF 20% 10V		R605	1-205-687-11	CEMENTED 54K 10% 7W	
C623	1-161-830-00	CERAMIC 0.0047MF 500V		R606	1-205-712-00	CEMENTED 3.9 5% 20W	
C624	1-161-830-00	CERAMIC 0.0047MF 500V		R608	1-247-867-00	CARBON 33K 5% 1/6W	
C625	1-102-228-00	CERAMIC 470PF 500V	10%	R609	1-247-855-00	CARBON 10K 5% 1/6W	
C626	1-161-830-00	CERAMIC 0.0047MF 500V		R610	1-247-847-00	CARBON 4.7K 5% 1/6W	
C627	1-161-830-00	CERAMIC 0.0047MF 500V		R611	1-247-829-00	CARBON 820 5% 1/6W	
C628	1-162-115-00	CERAMIC 330PF 10% 2KV		R612	1-247-825-00	CARBON 560 5% 1/6W	
C630	1-102-030-00	CERAMIC 330PF 10% 500V		R613	1-247-889-00	CARBON 270K 5% 1/6W	
C631	1-161-830-00	CERAMIC 0.0047MF 500V		R614	1-247-851-00	CARBON 6.8K 5% 1/6W	
C632	1-106-184-00	MYLAR 0.0033MF 10% 100V		R615	1-247-614-00	CARBON 3.3K 5% 1/8W	
C651	1-161-051-00	CERAMIC 0.01MF 10% 50V		R616	1-217-193-00	WIREWOUND 0.27 10% 2W	F
C652	1-106-212-00	MYLAR 0.047MF 10% 100V		R617	1-247-831-00	CARBON 1K 5% 1/8W	F
DIODE				R618	1-247-805-00	CARBON 82 5% 1/6W	
D601	8-719-503-06	DIODE S3WB60Z		R619	1-205-687-00	CEMENTED 54K 10% 7W	
D603	8-719-925-06	DIODE ERC25-06S		R620	1-206-690-00	METAL OXIDE 12K 5% 2W	F
D604	8-719-300-45	DIODE EM1Z		R622	1-247-866-00	CARBON 30K 5% 1/6W	
D605	8-719-911-19	DIODE ISS119		R623	1-247-891-00	CARBON 330K 5% 1/6W	
D606	8-719-100-35	DIODE RD5.6E-B2		R624	1-215-453-00	METAL 22K 1% 1/6W	
D608	8-719-924-06	DIODE ERC24-06S		R625	1-215-453-00	METAL 22K 1% 1/6W	
D609	8-719-300-45	DIODE EM1Z		R626	1-247-923-00	CARBON 470 5% 1/6W	
D651	8-719-101-43	DIODE RD4.3E-L2		R627	1-247-887-00	CARBON 220K 5% 1/6W	

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R628	1-247-873-00	CARBON	56K 5% 1/6W	R4	1-247-863-00	CARBON 22K 5% 1/6W		C219	1-123-318-00	ELECT	33MF 20% 16V	C330	1-102-959-00	CERAMIC	22PF 5% 50V
R629	1-247-903-00	CARBON	1M 5% 1/6W					C220	1-161-059-00	CERAMIC	0.047MF 20% 25V	C331	1-102-961-00	CERAMIC	27PF 5% 50V
R630	1-205-534-12	CEMENTED	56 10% 5W F					C221	1-102-525-00	CERAMIC	68PF 5% 50V	C332	1-102-973-00	CERAMIC	100PF 5% 50V
R631	1-205-534-12	CEMENTED	56 10% 5W F					C222	1-161-013-00	CERAMIC	0.01MF 20% 25V	C333	1-102-971-00	CERAMIC	82PF 5% 50V
R632	1-247-887-00	CARBON	220K 5% 1/6W					C224	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C334	1-161-379-00	CERAMIC	0.01MF 20% 25V
R633	1-247-871-00	CARBON	47K 5% 1/6W					C225	1-108-429-00	MYLAR	0.047MF 10% 200V	C335	1-161-379-00	CERAMIC	0.01MF 20% 25V
R634	1-247-878-00	CARBON	91K 5% 1/6W					C226	1-123-380-00	ELECT	1MF 20% 50V	C336	1-101-004-00	CERAMIC	0.01MF 50V
R635	1-247-587-00	CARBON	0.47 5% 1/4W					C227	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C337	1-161-034-00	CERAMIC	0.022MF 20% 25V
R636	1-247-636-00	CARBON	0.47 5% 1/8W F					C229	1-123-321-00	ELECT	220MF 20% 16V	C338	1-101-004-00	CERAMIC	0.01MF 50V
R637	1-247-823-00	CARBON	470 5% 1/6W					C230	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C342	1-123-380-00	ELECT	1MF 20% 50V
R642	1-214-779-00	METAL	120K 1% 1/6W					C241	1-102-074-00	CERAMIC	0.001MF 10% 50V	C343	1-102-113-00	CERAMIC	390PF 10% 50V
R651	1-214-779-00	METAL	3.3K 1% 1/4W					C242	1-102-114-00	CERAMIC	470PF 10% 50V	C344	1-102-114-00	CERAMIC	470PF 10% 50V
R652	1-215-433-00	METAL	3.3K 1% 1/6W					C243	1-101-969-00	CERAMIC	5PF 0.5PF 50V	C345	1-123-356-00	ELECT	10MF 20% 16V
R653	1-247-179-00	CARBON	100K 5% 1/4W					C244	1-101-969-00	CERAMIC	5PF 0.5PF 50V	C346	1-161-059-00	CERAMIC	0.047MF 20% 25V
R654	1-247-847-00	CARBON	4.7K 5% 1/6W					C245	1-101-969-00	CERAMIC	5PF 0.5PF 50V	C348	1-123-380-00	ELECT	1MF 20% 50V
R655	1-247-863-00	CARBON	22K 5% 1/6W					C246	1-161-059-00	CERAMIC	0.047MF 20% 25V	C349	1-123-380-00	ELECT	1MF 20% 50V
R656	1-247-831-00	CARBON	1K 5% 1/6W					C247	1-101-969-00	CERAMIC	5PF 0.5PF 50V	C350	1-102-110-00	CERAMIC	220PF 10% 50V
VARIABLE RESISTOR								C251	1-102-074-00	CERAMIC	0.001MF 10% 50V	C351	1-102-110-00	CERAMIC	220PF 10% 50V
RV601	1-230-230-00	RES, ADJ, CERAMIC CARBON 1K						C252	1-102-114-00	CERAMIC	470PF 10% 50V	C352	1-102-110-00	CERAMIC	220PF 10% 50V
TRANSFORMER								C256	1-161-059-00	CERAMIC	0.047MF 20% 25V	C353	1-123-380-00	ELECT	1MF 20% 50V
T601	1-441-855-11	TRANSFORMER, HEATER INSULATION						C261	1-102-074-00	CERAMIC	0.001MF 10% 50V	C354	1-102-961-00	CERAMIC	27PF 5% 50V
T602	1-446-194-00	TRANSFORMER, CHOPPER DRIVE						C262	1-102-114-00	CERAMIC	470PF 10% 50V	C355	1-161-059-00	CERAMIC	0.047MF 20% 25V
T603	1-421-605-21	TRANSFORMER, FERRITE (SRT)						C266	1-161-059-00	CERAMIC	0.047MF 20% 25V	C356	1-102-676-00	CERAMIC	68PF 5% 50V
THERMISTOR								C281	1-123-333-00	ELECT	100MF 20% 16V	C357	1-123-333-00	ELECT	100MF 20% 16V
TH601	1-800-945-00	THERMISTOR S-10K						C282	1-102-119-00	CERAMIC	0.0015MF 10% 50V	C361	1-161-379-00	CERAMIC	0.01MF 20% 25V
THP601	1-806-387-11	THERMISTOR (POSITIVE)						C283	1-123-381-00	ELECT	2.2MF 20% 50V	C391	1-102-973-00	CERAMIC	100PF 5% 50V
*****								C284	1-123-483-00	ELECT	47MF 20% 16V	C401	1-101-880-00	CERAMIC	47PF 5% 50V
*1-611-717-11 N BOARD								C285	1-123-323-00	ELECT	470MF 20% 16V	C404	1-102-953-00	CERAMIC	18PF 5% 50V
*****								C286	1-106-220-00	MYLAR	0.1MF 10% 100V	C405	1-101-890-00	CERAMIC	75PF 5% 50V
CAPACITOR								C287	1-123-324-00	ELECT	1000MF 20% 16V	C406	1-102-965-00	CERAMIC	39P 5% 50V
C1	1-123-611-00	ELECT	1MF 20% 50V	C151	1-106-220-00	MYLAR	0.1MF 10% 100V	C301	1-102-106-00	CERAMIC	100PF 10% 50V	C407	1-161-494-00	CERAMIC	0.022MF 30% 25V
C2	1-123-613-00	ELECT	3.3MF 20% 50V	C152	1-123-318-00	ELECT	33MF 20% 16V	C302	1-161-379-00	CERAMIC	0.01MF 20% 25V	C408	1-102-973-00	CERAMIC	100PF 5% 50V
C3	1-102-112-00	CERAMIC	330PF 10% 50V	C153	1-123-356-00	ELECT	10MF 20% 16V	C303	1-123-483-00	ELECT	47MF 20% 16V	C409	1-102-106-00	CERAMIC	100PF 10% 50V
C4	1-123-821-00	ELECT	47MF 20% 16V	C154	1-106-220-00	MYLAR	0.1MF 10% 100V	C304	1-161-059-00	CERAMIC	0.047MF 20% 25V	C410	1-102-703-00	CERAMIC	120PF 5% 50V
DIODE				C155	1-123-356-00	ELECT	10MF 20% 16V	C305	1-161-059-00	CERAMIC	0.047MF 20% 25V	C411	1-102-510-00	CERAMIC	12PF 5% 50V
D1	8-719-110-32	DIODE PH302B		C156	1-106-220-00	MYLAR	0.1MF 10% 100V	C306	1-161-379-00	CERAMIC	0.01MF 20% 25V	C412	1-161-271-00	CERAMIC	100PF 5% 50V
IC				C157	1-123-356-00	ELECT	10MF 20% 16V	C307	1-102-700-00	CERAMIC	82PF 5% 50V	C413	1-102-973-00	CERAMIC	100PF 5% 50V
IC1	8-752-010-60	IC CX20106		C158	1-106-220-00	MYLAR	0.1MF 10% 100V	C308	1-102-510-00	CERAMIC	12PF 5% 50V	C414	1-101-004-00	CERAMIC	0.01MF 50V
RESISTOR				C159	1-106-216-00	MYLAR	0.068MF 10% 100V	C309	1-101-361-00	CERAMIC	150PF 5% 50V	C501	1-106-212-00	MYLAR	0.047MF 10% 100V
R1	1-247-799-00	CARBON	47 5% 1/6W	C160	1-123-318-00	ELECT	33MF 20% 16V	C310	1-123-379-00	ELECT	0.47MF 20% 50V	C502	1-106-172-00	MYLAR	0.001MF 10% 100V
R2	1-247-775-00	CARBON	4.7 5% 1/6W	C201	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C311	1-106-192-00	MYLAR	0.0068MF 10% 100V	C503	1-123-380-00	ELECT	1MF 20% 50V
R3	1-214-784-00	METAL	200K 1% 1/4W	C202	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C312	1-106-192-00	MYLAR	0.0068MF 10% 100V	C504	1-106-176-00	MYLAR	0.0015MF 10% 100V
*****				C204	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C313	1-123-379-00	ELECT	0.47MF 20% 50V	C506	1-106-196-00	MYLAR	0.01MF 10% 100V
*****				C206	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C315	1-123-333-00	ELECT	100MF 20% 16V	C507	1-106-204-00	MYLAR	0.022MF 10% 100V
*****				C207	1-123-021-00	ELECT	0.47MF 30% 50V	C316	1-123-333-00	ELECT	100MF 20% 16V	C508	1-123-380-00	ELECT	1MF 20% 50V
*****				C208	1-106-204-00	MYLAR	0.022MF 10% 100V	C322	1-123-492-00	ELECT	33MF 20% 25V	C509	1-123-380-00	ELECT	1MF 20% 50V
*****				C209	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C323	1-123-356-00	ELECT	10MF 20% 16V	C510	1-106-204-00	MYLAR	0.022MF 10% 100V
*****				C210	1-102-510-00	CERAMIC	12PF 5% 50V	C324	1-161-379-00	CERAMIC	0.01MF 20% 25V	C511	1-106-180-00	MYLAR	0.0022MF 5% 100V
*****				C211	1-102-852-00	CERAMIC	47PF 5% 50V	C325	1-101-888-00	CERAMIC	68PF 5% 50V	C512	1-129-794-00	FILM	0.0033MF 2% 100V
*****				C212	1-123-380-00	ELECT	1MF 20% 50V	C326	1-123-381-00	ELECT	2.2MF 20% 50V	C513	1-123-380-00	ELECT	1MF 20% 50V
*****				C213	1-123-381-00	ELECT	2.2MF 20% 50V	C327	1-123-380-00	ELECT	1MF 20% 50V	C514	1-123-321-00	ELECT	220MF 20% 16V
*****				C214	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C328	1-123-380-00	ELECT	1MF 20% 50V	C515	1-106-212-00	MYLAR	0.047MF 5% 100V
*****				C215	1-102-125-00	CERAMIC	0.0047MF 10% 50V	C329	1-123-380-00	ELECT	1MF 20% 50V	C516	1-106-188-00	MYLAR	0.0047MF 10% 100V
*****				C216	1-101-004-00	CERAMIC	0.01MF 50V					C517	1-123-356-00	ELECT	10MF 20% 25V
*****				C217	1-161-059-00	CERAMIC	0.047MF 20% 25V								
*****				C218	1-123-379-00	ELECT	0.47MF 20% 50V								

A

Ref.No.	Part No.	Description	Remark
C518	1-131-368-00	TANTALUM 3.3MF 10%	16V
C519	1-136-173-00	FILM 0.47MF 5%	50V
C520	1-123-333-00	ELECT 100MF 20%	16V
C521	1-123-380-00	ELECT 1MF 20%	50V
C522	1-106-196-00	MYLAR 0.01MF 10%	100V
C523	1-123-380-00	ELECT 1MF 20%	50V
C524	1-106-210-00	MYLAR 0.039MF 10%	100V
C525	1-123-323-00	ELECT 470MF 20%	16V
C526	1-123-447-00	ELECT 0.22MF 20%	50V
C551	1-106-204-00	MYLAR 0.022MF 10%	100V
C552	1-102-244-00	CERAMIC 220PF 10%	500V
C553	1-123-360-00	ELECT 100MF 20%	50V
C554	1-123-348-00	ELECT 470MF 20%	35V
C555	1-123-336-00	ELECT 470MF 20%	25V
C571	1-123-483-00	ELECT 47MF 20%	16V
C572	1-101-880-00	CERAMIC 47PF 5%	50V
C801	1-123-024-00	ELECT 33MF 10%	160V
C802	1-102-114-00	CERAMIC 470PF 10%	50V
C803	1-106-385-00	FILM 0.056 10%	200V
C804	1-102-038-00	CERAMIC 0.001MF 10%	500V
C805	1-136-067-11	FILM 0.0036MF 3%	2KV
C806	1-102-212-00	CERAMIC 820PF 10%	500V
C807	1-136-115-00	FILM 0.56MF 5%	200V
C808	1-136-120-00	FILM 0.22MF 5%	400V
C809	1-102-112-00	CERAMIC 330PF 10%	50V
C810	1-121-806-00	ELECT 10MF 10%	16V
C811	1-102-244-00	CERAMIC 220PF 10%	500V
C812	1-162-115-00	FILM 330PF 10%	2KV
C813	1-106-200-00	MYLAR 0.015MF 10%	100V
C814	1-136-067-11	FILM 0.0036MF 3%	2KV
C815	1-123-380-00	ELECT 1MF 20%	50V
C816	1-108-692-11	MYLAR 0.01MF 10%	200V
C817	1-123-928-00	ELECT 0.47MF 20%	160V
C851	1-123-005-00	ELECT 22MF 20%	250V
C852	1-102-223-00	CERAMIC 0.0047MF 10%	2KV
C853	1-162-134-11	CERAMIC 470PF 10%	2KV
C854	1-123-334-00	ELECT 220MF 20%	25V
C855	1-123-252-00	ELECT 1MF 10%	160V
C856	1-162-134-11	CERAMIC 470PF 10%	2KV
C857	1-108-425-00	MYLAR 0.022MF 10%	200V
C858	1-101-004-00	CERAMIC 0.01MF 10%	50V
C859	1-123-333-00	ELECT 100MF 20%	16V
C860	1-102-228-00	CERAMIC 470PF 10%	500V
C863	1-123-348-00	ELECT 470MF 20%	35V
C864	1-106-220-00	MYLAR 0.1MF 10%	100V
C865	1-106-220-00	MYLAR 0.1MF 10%	100V
C871	1-123-356-00	ELECT 10MF 20%	50V
C872	1-123-330-00	ELECT 22MF 20%	16V
C873	1-123-359-00	ELECT 47MF 20%	50V
C874	1-123-379-00	ELECT 0.47MF 20%	50V
C875	1-123-379-00	ELECT 0.47MF 20%	50V
C876	1-123-369-00	ELECT 4.7MF 20%	50V
C877	1-101-004-00	CERAMIC 0.01MF 10%	50V

Ref.No.	Part No.	Description	Remark
<u>FILTER</u>			
CF241	1-409-332-00	CERAMIC TRAP (4.5MHZ)	
CF242	1-527-943-00	FILTER, CERAMIC	
CF243	1-404-469-00	DISCRIMINATOR, CERAMIC 4.5MHZ	
CF251	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF252	1-567-099-00	FILTER, CERAMIC	
CF253	1-404-473-00	DISCRIMINATOR, CERAMIC	
CF261	1-409-333-00	TRAP, CERAMIC (6.0MHZ)	
CF262	1-567-100-00	FILTER, CERAMIC	
CF263	1-404-490-00	DISCRIMINATOR, CERAMIC (6.0MHZ)	
CF301	1-409-338-00	TRAP, CERAMIC (4.328MHZ)	
CF401	1-409-344-00	CERAMIC TRAP 3.58MHZ	
<u>DIODE</u>			
D151	8-719-102-36	DIODE RD36E-L1	
D201	8-719-102-91	DIODE RD10E-N3	
D202	8-719-911-19	DIODE 1SS119	
D241	8-719-102-73	DIODE RD6.2E-N1	
D251	8-719-102-73	DIODE RD6.2E-N1	
D261	8-719-102-73	DIODE RD6.2E-N1	
D301	8-719-911-19	DIODE 1SS119	
D302	8-719-911-19	DIODE 1SS119	
D303	8-719-911-19	DIODE 1SS119	
D304	8-719-911-19	DIODE 1SS119	
D305	8-719-911-19	DIODE 1SS119	
D306	8-719-911-19	DIODE 1SS119	
D307	8-719-911-19	DIODE 1SS119	
D308	8-719-911-19	DIODE 1SS119	
D391	8-719-911-19	DIODE 1SS119	
D392	8-719-911-19	DIODE 1SS119	
D393	8-719-911-19	DIODE 1SS119	
D394	8-719-911-19	DIODE 1SS119	
D401	8-719-911-19	DIODE 1SS119	
D402	8-719-911-19	DIODE 1SS119	
D403	8-719-911-19	DIODE 1SS119	
D501	8-719-911-19	DIODE 1SS119	
D502	8-719-911-19	DIODE 1SS119	
D503	8-719-911-19	DIODE 1SS119	
D551	8-719-911-55	DIODE U05G	
D571	8-719-911-19	DIODE 1SS119	
D801	8-719-305-15	DIODE GH3F	
D802	8-719-901-93	DIODE V19E	
D803	8-719-911-55	DIODE U05G	
D851	8-719-924-06	DIODE ERC24-06S	
D852	8-719-903-09	DIODE V30N	
D853	8-719-924-06	DIODE ERC24-06S	
D854	8-719-911-55	DIODE U05G	
D855	8-719-924-06	DIODE ERC24-06S	
D856	8-719-102-99	DIODE RD13E-N1	
D871	8-719-901-94	DIODE V19CS	
D872	8-719-100-35	DIODE RD5.6E-B2	

Ref.No.	Part No.	Description	Remark
<u>DELAY LINE</u>			
DL301	1-415-176-00	DELAY LINE	
DL302	1-415-122-31	DELAY LINE	
<u>IC</u>			
IC151	8-759-800-12	IC LA7920	
IC201	8-752-001-51	IC CX20015A	
IC202	8-759-240-52	IC TC4052BP	
IC281	8-759-101-77	IC UPC1241H	
IC301	8-751-080-00	IC CX108	
IC302	8-751-090-10	IC CX109	
IC303	8-759-240-53	IC TC4053BP	
IC501	8-759-100-60	IC UPC1377C	
IC551	8-759-113-78	IC UPC1378H-L	
IC571	8-759-909-70	IC CX23025	
<u>COIL</u>			
L151	1-408-454-00	MICRO INDUCTOR 100UH	
L152	1-408-397-00	MICRO INDUCTOR 1UH	
L202	1-408-397-00	MICRO INDUCTOR 1UH	
L203	1-408-418-00	MICRO INDUCTOR 56UH	
L241	1-408-410-00	MICRO INDUCTOR 12UH	
L242	1-408-402-00	MICRO INDUCTOR 2.7UH	
L243	1-408-414-00	MICRO INDUCTOR 27UH	
L244	1-408-417-00	MICRO INDUCTOR 47UH	
L245	1-409-372-00	COIL, TRAP	
L246	1-409-372-00	COIL, TRAP	
L251	1-408-411-00	MICRO INDUCTOR 15UH	
L252	1-408-400-00	MICRO INDUCTOR 1.8UH	
L253	1-408-413-00	MICRO INDUCTOR 22UH	
L261	1-408-409-00	MICRO INDUCTOR 10UH	
L262	1-408-399-00	MICRO INDUCTOR 1.5UH	
L263	1-408-411-00	MICRO INDUCTOR 15UH	
L301	1-408-407-00	MICRO INDUCTOR 6.8UH	
L302	1-408-417-00	MICRO INDUCTOR 47UH	
L303	1-408-455-11	MICRO INDUCTOR 120UH	
L304	1-408-410-00	MICRO INDUCTOR 12UH	
L305	1-408-415-00	MICRO INDUCTOR 33UH	
L306	1-408-409-00	MICRO INDUCTOR 10UH	
L307	1-407-507-00	MICRO INDUCTOR 18MH	
L308	1-408-415-00	MICRO INDUCTOR 33UH	
L310	1-408-410-00	MICRO INDUCTOR 12UH	
L401	1-408-408-00	MICRO INDUCTOR 8.2UH	
L402	1-408-419-00	MICRO INDUCTOR 68UH	
L403	1-408-413-00	MICRO INDUCTOR 22UH	
L571	1-408-409-00	MICRO INDUCTOR 10UH	
L801	1-407-556-00	CHOKE COIL	
L803	1-407-365-00	COIL, CHOKE	
L804	1-459-407-11	COIL, FERRITE CHOKE 30UH	
L805	1-459-496-11	COIL, FERRITE (MLC)	
L806	1-459-349-21	COIL, VAR, FERRITE (HWC)	
L851	1-408-240-00	MICRO INDUCTOR 6.8MH	

Ref.No.	Part No.	Description	Remark
L852	1-407-556-00	CHOKE COIL	
<u>TRANSISTOR</u>			
Q151	8-729-245-83	TRANSISTOR 2SC2458	
Q201	8-724-375-01	TRANSISTOR 2SC403C	
Q202	8-729-177-43	TRANSISTOR 2SD774	
Q203	8-729-204-83	TRANSISTOR 2SA1048GR	
Q241	8-729-204-83	TRANSISTOR 2SA1048GR	
Q242	8-729-204-83	TRANSISTOR 2SA1048GR	
Q243	8-729-900-36	TRANSISTOR DTC124ES	
Q244	8-729-900-36	TRANSISTOR DTC124ES	
Q245	8-729-900-36	TRANSISTOR DTC124ES	
Q251	8-729-204-83	TRANSISTOR 2SA1048GR	
Q252	8-729-204-83	TRANSISTOR 2SA1048GR	
Q253	8-729-900-36	TRANSISTOR DTC124ES	
Q261	8-729-204-83	TRANSISTOR 2SA1048GR	
Q262	8-729-204-83	TRANSISTOR 2SA1048GR	
Q263	8-729-900-36	TRANSISTOR DTC124ES	
Q271	8-729-900-36	TRANSISTOR DTC124ES	
Q281	8-729-177-32	TRANSISTOR 2SD773	
Q301	8-724-375-01	TRANSISTOR 2SC403C	
Q302	8-729-245-83	TRANSISTOR 2SC2458	
Q303	8-729-103-43	TRANSISTOR 2SB734	
Q304	8-729-245-83	TRANSISTOR 2SC2458	
Q305	8-729-245-83	TRANSISTOR 2SC2458	
Q306	8-729-245-83	TRANSISTOR 2SC2458	
Q307	8-729-245-83	TRANSISTOR 2SC2458	
Q308	8-729-245-83	TRANSISTOR 2SC2458	
Q309	8-729-245-83	TRANSISTOR 2SC2458	
Q310	8-729-105-72	TRANSISTOR 2SK523-L1	
Q311	8-729-900-36	TRANSISTOR DTC124ES	
Q391	8-729-245-83	TRANSISTOR 2SC2458	
Q392	8-729-245-83	TRANSISTOR 2SC2458	
Q393	8-729-245-83	TRANSISTOR 2SC2458	
Q401	8-729-105-72	TRANSISTOR 2SK523-L1	
Q402	8-729-245-83	TRANSISTOR 2SC2458	
Q403	8-729-245-83	TRANSISTOR 2SC2458	
Q404	8-729-245-83	TRANSISTOR 2SC2458	
Q405	8-729-245-83	TRANSISTOR 2SC2458	
Q406	8-729-245-83	TRANSISTOR 2SC2458	
Q407	8-729-245-83	TRANSISTOR 2SC2458	
Q408	8-729-245-83	TRANSISTOR 2SC2458	
Q409	8-729-204-83	TRANSISTOR 2SA1048GR	
Q410	8-729-105-72	TRANSISTOR 2SK523-L1	
Q411	8-729-245-83	TRANSISTOR 2SC2458	
Q412	8-729-245-83	TRANSISTOR 2SC2458	
Q571	8-729-900-36	TRANSISTOR DTC124ES	
Q572	8-729-900-36	TRANSISTOR DTC124ES	
Q573	8-729-900-36	TRANSISTOR DTC124ES	

A

Ref.No.	Part No.	Description	Remark
Q574	8-729-900-36	TRANSISTOR DTC124ES	
Q575	8-729-900-36	TRANSISTOR DTC124ES	
Q801	8-729-168-82	TRANSISTOR 2SC2688	
Q802	8-729-800-35	TRANSISTOR 2SD1397	
Q803	8-729-245-83	TRANSISTOR 2SC2458	
Q804	8-729-245-83	TRANSISTOR 2SC2458	
Q851	8-729-313-42	TRANSISTOR 2SD1134	
Q871	8-729-245-83	TRANSISTOR 2SC2458	
Q872	8-729-204-83	TRANSISTOR 2SA1048GR	
RESISTOR			
R151	1-247-888-00	CARBON 240K 5% 1/6W	
R152	1-247-883-00	CARBON 150K 5% 1/6W	
R153	1-247-857-00	CARBON 12K 5% 1/6W	
R154	1-246-473-00	CARBON 1K 5% 1/4W	
R155	1-246-473-00	CARBON 1K 5% 1/4W	
R156	1-247-867-00	CARBON 33K 5% 1/6W	
R157	1-247-891-00	CARBON 330K 5% 1/6W	
R158	1-247-855-00	CARBON 10K 5% 1/6W	
R159	1-246-465-00	CARBON 470 5% 1/4W	
R160	1-247-871-00	CARBON 47K 5% 1/6W	
R161	1-247-888-00	CARBON 240K 5% 1/6W	
R162	1-247-883-00	CARBON 150K 5% 1/6W	
R201	1-247-797-00	CARBON 39 5% 1/6W	
R202	1-247-847-00	CARBON 4.7K 5% 1/6W	
R203	1-247-845-00	CARBON 3.9K 5% 1/6W	
R204	1-247-815-00	CARBON 220 5% 1/6W	
R205	1-247-823-00	CARBON 470 5% 1/6W	
R206	1-247-835-00	CARBON 1.5K 5% 1/6W	
R207	1-247-871-00	CARBON 47K 5% 1/6W	
R208	1-247-871-00	CARBON 47K 5% 1/6W	
R209	1-247-839-00	CARBON 2.2K 5% 1/6W	
R210	1-247-839-00	CARBON 2.2K 5% 1/6W	
R211	1-246-505-00	CARBON 22K 5% 1/4W	
R212	1-247-857-00	CARBON 12K 5% 1/6W	
R213	1-247-857-00	CARBON 12K 5% 1/6W	
R214	1-247-841-00	CARBON 2.7K 5% 1/6W	
R215	1-247-831-00	CARBON 1K 5% 1/6W	
R216	1-247-831-00	CARBON 1K 5% 1/6W	
R217	1-247-831-00	CARBON 1K 5% 1/6W	
R218	1-247-863-00	CARBON 22K 5% 1/6W	
R219	1-247-845-00	CARBON 3.9K 5% 1/6W	
R220	1-247-815-00	CARBON 220 5% 1/6W	
R221	1-247-883-00	CARBON 150K 5% 1/6W	
R222	1-246-489-00	CARBON 4.7K 5% 1/4W	
R223	1-247-831-00	CARBON 1K 5% 1/6W	
R224	1-247-873-00	CARBON 56K 5% 1/6W	
R225	1-247-873-00	CARBON 56K 5% 1/6W	
R226	1-246-469-00	CARBON 680 5% 1/4W	
R227	1-246-457-00	CARBON 220 5% 1/4W	
R241	1-247-879-00	CARBON 100K 5% 1/6W	
R242	1-247-831-00	CARBON 1K 5% 1/6W	
R243	1-247-817-00	CARBON 270 5% 1/6W	
R244	1-247-807-00	CARBON 100 5% 1/6W	
R245	1-246-473-00	CARBON 1K 5% 1/4W	

Ref.No.	Part No.	Description	Remark
R246	1-246-481-00	CARBON 2.2K 5% 1/4W	
R247	1-247-839-00	CARBON 2.2K 5% 1/6W	
R248	1-247-831-00	CARBON 1K 5% 1/6W	
R249	1-247-879-00	CARBON 100K 5% 1/6W	
R251	1-247-879-00	CARBON 100K 5% 1/6W	
R252	1-247-831-00	CARBON 1K 5% 1/6W	
R253	1-247-817-00	CARBON 270 5% 1/6W	
R254	1-247-807-00	CARBON 100 5% 1/6W	
R255	1-247-826-00	CARBON 620 5% 1/6W	
R258	1-247-828-00	CARBON 750 5% 1/6W	
R259	1-246-521-00	CARBON 100K 5% 1/4W	
R260	1-247-839-00	CARBON 2.2K 5% 1/6W	
R261	1-246-521-00	CARBON 100K 5% 1/4W	
R262	1-247-831-00	CARBON 1K 5% 1/6W	
R263	1-247-814-00	CARBON 200 5% 1/6W	
R264	1-247-807-00	CARBON 100 5% 1/6W	
R265	1-246-465-00	CARBON 470 5% 1/4W	
R268	1-247-828-00	CARBON 750 5% 1/6W	
R269	1-247-879-00	CARBON 100K 5% 1/6W	
R271	1-247-835-00	CARBON 1.5K 5% 1/6W	
R281	1-247-819-00	CARBON 330 5% 1/6W	
R282	1-247-863-00	CARBON 22K 5% 1/6W	
R283	1-247-831-00	CARBON 1K 5% 1/6W	
R284	1-247-071-00	CARBON 1 5% 1/4W	
R301	1-247-807-00	CARBON 100 5% 1/6W	
R302	1-247-835-00	CARBON 1.5K 5% 1/6W	
R304	1-246-509-00	CARBON 33K 5% 1/4W	
R306	1-247-849-00	CARBON 5.6K 5% 1/6W	
R307	1-247-833-00	CARBON 1.2K 5% 1/6W	
R308	1-247-813-00	CARBON 180 5% 1/6W	
R309	1-247-817-00	CARBON 270 5% 1/6W	
R310	1-247-843-00	CARBON 3.3K 5% 1/6W	
R311	1-247-863-00	CARBON 22K 5% 1/6W	
R312	1-247-843-00	CARBON 3.3K 5% 1/6W	
R313	1-247-853-00	CARBON 8.2K 5% 1/6W	
R314	1-247-863-00	CARBON 22K 5% 1/6W	
R315	1-247-843-00	CARBON 3.3K 5% 1/6W	
R321	1-247-823-00	CARBON 470 5% 1/6W	
R322	1-247-835-00	CARBON 1.5K 5% 1/6W	
R323	1-246-473-00	CARBON 1K 5% 1/4W	
R324	1-247-847-00	CARBON 4.7K 5% 1/6W	
R325	1-247-841-00	CARBON 2.7K 5% 1/6W	
R326	1-247-873-00	CARBON 56K 5% 1/6W	
R327	1-247-839-00	CARBON 2.2K 5% 1/6W	
R328	1-247-839-00	CARBON 2.2K 5% 1/6W	
R329	1-247-093-00	CARBON 27 5% 1/4W	
R330	1-247-155-00	CARBON 10K 5% 1/4W	
R331	1-247-141-00	CARBON 2.7K 5% 1/4W	
R332	1-247-875-00	CARBON 68K 5% 1/6W	
R333	1-247-823-00	CARBON 470 5% 1/6W	
R334	1-247-815-00	CARBON 220 5% 1/6W	

Ref.No.	Part No.	Description	Remark
R335	1-246-487-00	CARBON 3.9K 5% 1/4W	
R336	1-247-177-00	CARBON 82K 5% 1/4W	
R337	1-246-473-00	CARBON 1K 5% 1/4W	
R338	1-247-155-00	CARBON 10K 5% 1/4W	
R339	1-247-839-00	CARBON 2.2K 5% 1/6W	
R340	1-247-871-00	CARBON 47K 5% 1/6W	
R341	1-246-513-00	CARBON 47K 5% 1/4W	
R342	1-246-457-00	CARBON 220 5% 1/4W	
R343	1-246-469-00	CARBON 680 5% 1/4W	
R344	1-247-828-00	CARBON 750 5% 1/6W	
R345	1-247-853-00	CARBON 8.2K 5% 1/6W	
R346	1-247-855-00	CARBON 10K 5% 1/6W	
R347	1-247-807-00	CARBON 100 5% 1/6W	
R348	1-247-811-00	CARBON 150 5% 1/6W	
R349	1-247-823-00	CARBON 470 5% 1/6W	
R350	1-247-119-00	CARBON 330 5% 1/4W	
R351	1-246-493-00	CARBON 6.8K 5% 1/4W	
R352	1-247-857-00	CARBON 12K 5% 1/6W	
R353	1-247-839-00	CARBON 2.2K 5% 1/6W	
R354	1-247-807-00	CARBON 100 5% 1/6W	
R355	1-247-827-00	CARBON 680 5% 1/6W	
R356	1-247-855-00	CARBON 6.8K 5% 1/6W	
R357	1-247-831-00	CARBON 1K 5% 1/6W	
R358	1-247-821-00	CARBON 390 5% 1/6W	
R359	1-247-823-00	CARBON 470 5% 1/6W	
R361	1-247-831-00	CARBON 1K 5% 1/6W	
R363	1-247-831-00	CARBON 1K 5% 1/6W	
R364	1-247-845-00	CARBON 3.9K 5% 1/6W	
R365	1-247-847-00	CARBON 4.7K 5% 1/6W	
R367	1-247-851-00	CARBON 6.8K 5% 1/6W	
R368	1-247-831-00	CARBON 1K 5% 1/6W	
R371	1-247-889-00	CARBON 270K 5% 1/6W	
R372	1-247-857-00	CARBON 12K 5% 1/6W	
R373	1-247-855-00	CARBON 10K 5% 1/6W	
R374	1-246-489-00	CARBON 4.7K 5% 1/4W	
R375	1-246-477-00	CARBON 1.5K 5% 1/4W	
R376	1-247-841-00	CARBON 2.7K 5% 1/6W	
R377	1-247-875-00	CARBON 68K 5% 1/6W	
R378	1-247-875-00	CARBON 68K 5% 1/6W	
R379	1-247-125-00	CARBON 560 5% 1/4W	
R380	1-247-825-00	CARBON 560 5% 1/6W	
R381	1-247-825-00	CARBON 560 5% 1/6W	
R382	1-247-835-00	CARBON 1.5K 5% 1/6W	
R383	1-247-835-00	CARBON 1.5K 5% 1/6W	
R384	1-247-835-00	CARBON 1.5K 5% 1/6W	
R385	1-247-875-00	CARBON 68K 5% 1/6W	
R386	1-247-863-00	CARBON 33K 5% 1/6W	
R391	1-247-871-00	CARBON 47K 5% 1/6W	
R392	1-247-871-00	CARBON 47K 5% 1/6W	
R393	1-247-821-00	CARBON 390 5% 1/6W	
R394	1-247-867-00	CARBON 33K 5% 1/6W	
R395	1-247-845-00	CARBON 33K 5% 1/6W	
R396	1-246-517-00	CARBON 68K 5% 1/4W	
R401	1-247-871-00	CARBON 47K 5% 1/6W	

Ref.No.	Part No.	Description	Remark
R402	1-247-879-00	CARBON 100K 5% 1/6W	
R403	1-247-823-00	CARBON 470 5% 1/6W	
R404	1-247-835-00	CARBON 1.5K 5% 1/6W	
R405	1-247-871-00	CARBON 47K 5% 1/6W	
R406	1-247-841-00	CARBON 2.7K 5% 1/6W	
R407	1-247-871-00	CARBON 47K 5% 1/6W	
R408	1-247-891-00	CARBON 330K 5% 1/6W	
R409	1-246-513-00	CARBON 47K 5% 1/4W	
R410	1-247-891-00	CARBON 330K 5% 1/6W	
R411	1-247-807-00	CARBON 100 5% 1/6W	
R412	1-247-833-00	CARBON 1.2K 5% 1/6W	
R413	1-247-871-00	CARBON 47K 5% 1/6W	
R414	1-246-481-00	CARBON 2.2K 5% 1/4W	
R415	1-247-871-00	CARBON 47K 5% 1/6W	
R416	1-247-847-00	CARBON 4.7K 5% 1/6W	
R418	1-246-513-00	CARBON 47K 5% 1/4W	
R419	1-247-871-00	CARBON 47K 5% 1/6W	
R420	1-247-871-00	CARBON 47K 5% 1/6W	
R421	1-247-867-00	CARBON 33K 5% 1/6W	
R422	1-247-871-00	CARBON 47K 5% 1/6W	
R431	1-246-513-00	CARBON 47K 5% 1/4W	
R432	1-247-855-00	CARBON 10K 5% 1/6W	
R433	1-247-855-00	CARBON 10K 5% 1/6W	
R434	1-247-871-00	CARBON 47K 5% 1/6W	
R435	1-247-847-00	CARBON 4.7K 5% 1/6W	
R436	1-246-505-00	CARBON 22K 5% 1/4W	
R437	1-246-485-00	CARBON 3.3K 5% 1/4W	
R501	1-247-819-00	CARBON 330 5% 1/6W	
R502	1-247-817-00	CARBON 270 5% 1/6W	
R503	1-247-851-00	CARBON 6.8K 5% 1/8W	
R504	1-247-877-00	CARBON 82K 5% 1/6W	
R505	1-247-843-00	CARBON 3.3K 5% 1/6W	
R506	1-247-868-00	CARBON 36K 5% 1/6W	
R507	1-247-857-00	CARBON 12K 5% 1/6W	
R511	1-247-877-00	CARBON 82K 5% 1/6W	
R512	1-213-158-00	METAL OXIDE 18K 5% 1W	F
R514	1-214-768-00	METAL 43K 1% 1/4W	
R515	1-247-847-00	CARBON 4.7K 5% 1/6W	
R516	1-247-857-00	CARBON 12K 5% 1/6W	
R517	1-247-854-00	CARBON 9.1K 5% 1/6W	
R519	1-247-849-00	CARBON 5.6K 5% 1/6W	
R520	1-246-469-00	CARBON 680 5% 1/4W	
R521	1-247-820-00	CARBON 360 5% 1/6W	
R522	1-215-463-00	METAL 56K 1% 1/6W	
R523	1-247-793-00	CARBON 27 5% 1/6W	
R524	1-214-783-00	METAL 180K 1% 1/4W	
R525	1-215-455-00	METAL 27K 1% 1/6W	
R526	1-247-873-00	CARBON 56K 5% 1/6W	
R527	1-247-841-00	CARBON 2.7K 5% 1/6W	
R528	1-247-845-00	CARBON 3.9K 5% 1/6W	
R529	1-215-461-00	METAL 47K 1% 1/6W	



Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
R530	1-247-783-00	CARBON	10 5% 1/8W F	R873	1-214-751-00	METAL	8.2K 1% 1/4W	*:1-611-939-11	M1 BOARD			C011	1-102-520-00	CERAMIC	39PF 5% 50V
R531	1-247-155-00	CARBON	10K 5% 1/4W	R874	1-247-823-00	METAL	1/4W		*****			C012	1-123-308-00	ELECT	220MF 20% 10V
R532	1-247-827-00	CARBON	680 5% 1/6W	R875	1-247-823-00	CARBON	470 5% 1/6W					C013	1-102-115-00	CERAMIC	560PF 10% 50V
R533	1-247-825-00	CARBON	560 5% 1/6W	R876	1-214-783-00	METAL	180K 1% 1/4W					C014	1-102-973-00	CERAMIC	100PF 5% 50V
R534	1-247-855-00	CARBON	10K 5% 1/6W	R878	1-246-521-00	CARBON	100K 5% 1/4W					C015	1-101-884-00	CERAMIC	56PF 5% 50V
R535	1-247-831-00	CARBON	1K 5% 1/6W												
R536	1-247-871-00	CARBON	47K 5% 1/6W	R881	1-247-887-00	CARBON	220K 5% 1/6W					C016	1-102-121-00	CERAMIC	0.0022MF 10% 50V
R537	1-247-867-00	CARBON	33K 5% 1/6W	R882	1-247-867-00	CARBON	33K 5% 1/6W					C017	1-102-108-00	CERAMIC	150PF 10% 50V
R551	1-247-783-00	CARBON	10 5% 1/8W F	R887	1-215-466-00	METAL	75K 1% 1/6W					C018	1-123-356-00	ELECT	10MF 20% 16V
R552	1-247-230-00	CARBON	390 5% 1/2W									C019	1-102-074-00	CERAMIC	0.001MF 10% 50V
R553	1-212-362-00	METAL OXIDE	1.5 5% 1W F									C020	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R554	1-213-139-00	METAL OXIDE	470 5% 1W F												
R571	1-247-843-00	CARBON	3.3K 5% 1/6W									C021	1-102-110-00	CERAMIC	220PF 10% 50V
R572	1-247-847-00	CARBON	4.7K 5% 1/6W									C023	1-101-004-00	CERAMIC	0.01MF 50V
R573	1-247-835-00	CARBON	1.5K 5% 1/6W									C024	1-102-120-00	CERAMIC	0.0018MF 10% 50V
R574	1-247-835-00	CARBON	1.5K 5% 1/6W									C026	1-102-110-00	CERAMIC	220PF 10% 50V
R575	1-246-530-00	CARBON	240K 5% 1/4W									C027	1-102-106-00	CERAMIC	100PF 10% 50V
R576	1-246-477-00	CARBON	1.5K 5% 1/4W									C028	1-123-380-00	ELECT	1MF 20% 50V
R577	1-247-871-00	CARBON	47K 5% 1/6W									C029	1-123-382-00	ELECT	3.3MF 20% 50V
R578	1-247-867-00	CARBON	33K 5% 1/6W									C030	1-101-880-00	CERAMIC	47PF 5% 50V
R579	1-247-859-00	CARBON	15K 5% 1/6W									C031	1-123-318-00	ELECT	33MF 20% 16V
R580	1-247-851-00	CARBON	6.8K 5% 1/8W									C032	1-106-178-00	MYLAR	0.0018MF 5% 50V
R581	1-247-853-00	CARBON	8.2K 5% 1/6W									C033	1-123-380-00	ELECT	1MF 20% 50V
R582	1-246-530-00	CARBON	240K 5% 1/4W									C034	1-101-004-00	CERAMIC	0.01MF 50V
R801	1-247-819-00	CARBON	330 5% 1/6W									C035	1-102-121-00	CERAMIC	0.0022MF 10% 50V
R802	1-247-847-00	CARBON	4.7K 5% 1/6W									C036	1-123-483-00	ELECT	47MF 20% 16V
R803	1-205-642-00	CEMENTED	3.3K 10% 5W									C037	1-106-196-00	MYLAR	0.01MF 10% 100V
R804	1-247-666-00	CARBON	4.7K 5% 1/4W F									C038	1-101-004-00	CERAMIC	0.01MF 50V
R805	1-246-485-00	CARBON	3.3K 5% 1/4W									C039	1-102-074-00	CERAMIC	0.001MF 10% 50V
R806	1-247-871-00	CARBON	47K 5% 1/6W									C040	1-123-382-00	ELECT	3.3MF 20% 50V
R807	1-213-139-00	METAL OXIDE	470 5% 1W F									C041	1-101-004-00	CERAMIC	0.01MF 50V
R808	1-213-149-00	METAL OXIDE	3.3 5% 1W F									C042	1-102-106-00	CERAMIC	100PF 10% 50V
R809	1-206-646-00	METAL OXIDE	180 5% 2W F									C043	1-102-074-00	CERAMIC	0.001MF 10% 50V
R810	1-213-138-00	METAL OXIDE	390 5% 1W F									C044	1-123-586-00	ELECT	0.1MF 20% 50V
R811	1-247-867-00	CARBON	33K 5% 1/6W									C045	1-123-379-00	ELECT	0.47MF 20% 50V
R812	1-247-835-00	CARBON	1.5K 5% 1/6W									C046	1-106-224-00	MYLAR	0.15MF 10% 100V
R813	1-247-847-00	CARBON	4.7K 5% 1/6W									C047	1-106-216-00	MYLAR	0.068MF 10% 100V
R814	1-247-855-00	CARBON	10K 5% 1/8W									C048	1-123-356-00	ELECT	10MF 20% 50V
R815	1-247-828-00	CARBON	750 5% 1/6W									C049	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R816	1-206-467-00	METAL OXIDE	15 5% 2W F												
R817	1-206-640-00	METAL OXIDE	100 5% 2W F												
R851	1-210-859-00	CARBON	1.2 5% 1/8W F												
R852	1-247-831-00	CARBON	1K 5% 1/8W F												
R853	1-247-636-00	CARBON	0.47 5% 1/8W F												
R854	1-247-636-00	CARBON	0.47 5% 1/8W F												
R855	1-214-888-00	METAL	10K 1% 1/2W												
R856	1-214-747-00	METAL	5.6K 1% 1/4W												
R857	1-215-468-00	METAL	91K 1% 1/6W												
R858	1-247-849-00	CARBON	5.6K 5% 1/6W												
R859	1-206-644-00	METAL OXIDE	150 5% 2W F												
R860	1-215-468-00	METAL	91K 1% 1/6W												
R871	1-247-021-00	CARBON	1.5 5% 1/8W F												
R872	1-215-448-00	METAL	13K 1% 1/6W												

C.

KV1882AEB  
494

Ref.No.	Part No.	Description	Remark
MISCELLANEOUS			
*****			
	Δ 1-451-247-11	DEFLECTION YOKE (SY-139)	
	1-452-032-00	MAGNET, DISK; 10MM Ø	
	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM Ø	
	1-452-277-00	MAGNET, BMC	
	*1-534-805-00	PIN CABLE	
	Δ 1-536-494-11	ANT TERMINAL ASSY	
	Δ 1-551-427-21	CORD, POWER, EULO PLUG	
L901	Δ 1-426-179-11	COIL, DEGAUSSING	
L902	Δ 1-426-179-11	COIL, DEGAUSSING	
S901	Δ 1-553-225-12	SWITCH, PUSH	
SP901	1-503-239-00	SPEAKER	
T851	Δ 1-439-333-11	TRANSFORMER ASSY, FLYBACK	
TU151	Δ 1-463-421-00	TUNER, ET (BT-883)	
V901	Δ 8-736-153-05	CRT (A44FZ00X)	

\*\*\*\*\*

ACCESSORIES AND PACKING MATERIALS

\*\*\*\*\*

Part No.	Description	Remark
A-1470-677-A	COMMANDER ASSY (RM-626)	
1-417-094-00	MIXER, U/V (PAL)	
1-501-284-00	ANTENNA, TELESCOPIC (AN-18E) (E ONLY)	
1-501-329-11	ANTENNA, TELESCOPIC (E ONLY)	
1-506-409-00	ADAPTOR, CONVERSION	
1-513-382-00	ANTENNA, MUTCHING (E ONLY)	
3-701-622-00	BAG, POLYESTYLENE	
4-369-325-01	BAG, PROTECTION	
4-371-527-01	CUSHION (UPPER) (ASSY)	
4-371-528-01	CUSHION (LOWER) (ASSY)	
4-371-547-01	INDIVIDUAL CARTON	
4-491-791-01	SCHEMATIC DIAGRAM (B2)	
4-491-827-41	INSTRUCTION, ACCESSORY (PX ONLY))	
4-491-827-51	INSTRUCTION, ACCESSORY (E ONLY)	
4-493-928-71	MANUAL, INSTRUCTION (PX ONLY)	
4-493-994-61	MANUAL, INSTRUCTION (E ONLY)	

## CORRECTION

### PX Model

\*Chassis Model Number Label of KV-1882AEB PX model serial number 2,002,401 to 2,003,200 are printed incorrect number, SCC-573A-A. Correct chassis number is SCC-573A-B.

### *E Model*

August, 1986

No. 1

: Added Portion

**Incorrect**


**Correct**

### PX Model

### *E Model*

Chassis No. SCC-573A-B

### PX Model

 *Serial No. 2,000,001 and later*  
*Chassis No. SCC-573A-B*

\* Chassis Model Number Label of KV-1882AEB PX model serial number 2,002,401 to 2,003,200 are printed incorrect number, SCC-573A-A. Correct chassis number is SCC-573A-B.

### *E Model*

Chassis No. SCC-573A-B

## SPECIFICATIONS

**Power consumption** 82 W

## SPECIFICATIONS

Power consumption 85 W